

JULY 2022

Sht 1 of 2

## CR-3, Concrete Base

- (A) 9' x 26' = 234 sf  
 (B) 17' x 37' = 629 sf  
 (C) 1/2 x 14' x 14' = 98 sf  
 (D) 16' x 20' = 320 sf  
 (E) 12' x 150' = 1,800 sf  
 (F) 20' x 50' = 1,000 sf

Total = 4,081 SF


## CR-4, 12" CL2 Aggregate Base

4,081 sf - (A)  
 4,081 sf - 234 sf = 3,847 sf  
 (3,847 sf x 1') ÷ 27 = 142.5 CY  
 27 (comp. into CY)

## NOTES:

- BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS 294 AND BM10144, PRIOR TO CONSTRUCTION.
- FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2715 PRIOR TO EXCAVATION.
- REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
- REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
- REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
- REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
- ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
- CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
- PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-252.
- REMOVE (E) L/S AND REPLACE WITH SIDEWALK CONFORMING TO CALTRANS STANDARDS.
- (E) ELEVATIONS ARE BASED ON SURVEY INFORMATION RECEIVED FROM SFPD ON 10/26/2018. CONTRACTOR SHALL VERIFY CONFORM ELEVATIONS IN FIELD PRIOR TO CONSTRUCTION.
- REFER TO PD-DWGS IN PLAN SET FOR ALL PAVEMENT MARKINGS, AND STRIPING LAYOUT.
- PG&E TO ABANDON.
- PROPOSED MEDIAN TO BE CONSTRUCTED BY OTHERS.

MATCH LINE - SEE SHEET C16D

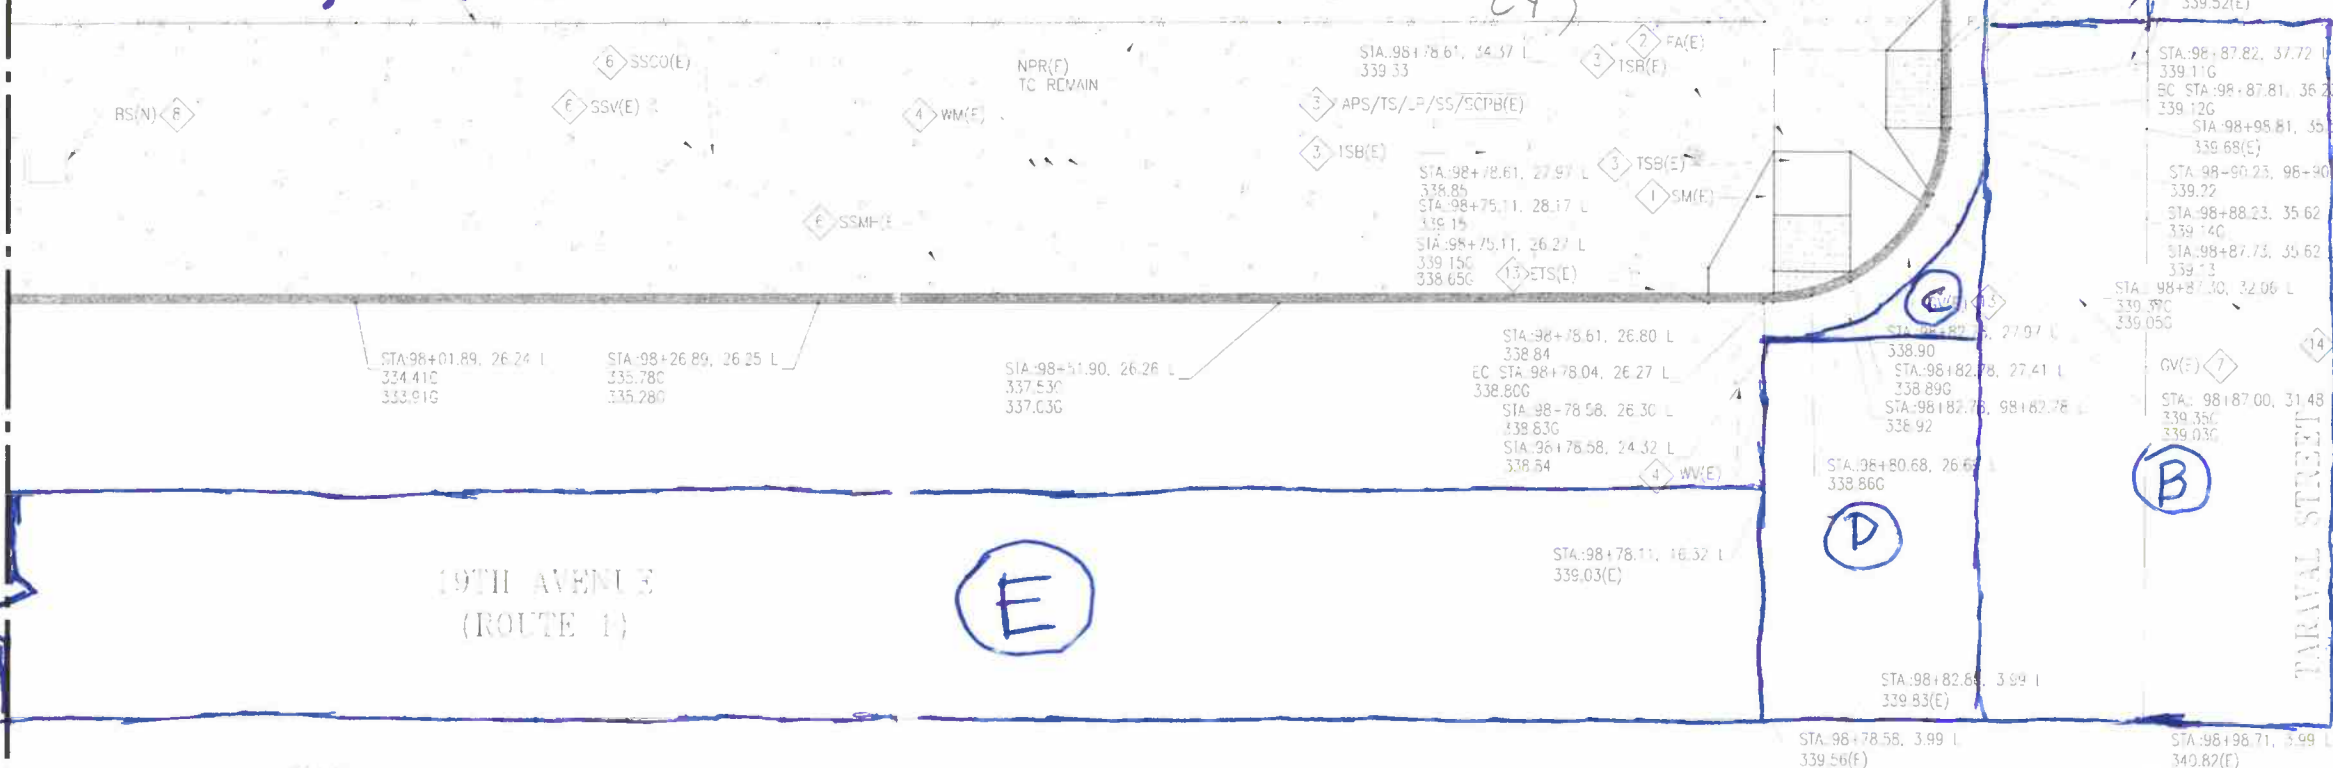

## CR-2, Hot Mix AC

7/8/22 = 18.0 Tons  
 7/11/22 = 21.02 Tons  
 7/12/22 = 26.03 Tons

Total = 65.05 Tons

see attached  
AC Tags

**TELAMON**  
 ENGINEERING CONSULTANTS, INC.  
 855 FOLSOM STREET, SUITE 142  
 SAN FRANCISCO, CA 94107  
 TEL: 415-837-1336 FAX: 415-837-1354



BUREAU OF ENGINEERING  
 CITY & COUNTY OF SAN FRANCISCO  
 SAN FRANCISCO PUBLIC WORKS  
 30 VAN NESS AVENUE, 5TH FLOOR  
 SAN FRANCISCO, CA 94102-6028

Acting Section Chief	Date	Acting Section Chief	Date
ERIC KJELSBERG	12/13/19	ERIC KJELSBERG	12/13/19
ERIN GIBBONS	12/16/19	ERIN GIBBONS	12/16/19
IRVING CISNEROS	12/16/19	IRVING CISNEROS	12/16/19
JOEL CHAPRA	12/16/19	JOEL CHAPRA	12/16/19
JOEL CHAPRA	12/16/19	JOEL CHAPRA	12/16/19

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	ST	1	RC.94/4.05
19TH AVENUE (STATE ROUTE 1) (COMBINED) CITY PROJECT						1000005832
19TH AVENUE AND TARAVAL STREET CONSTRUCTION DETAILS						C-16C
1" = 5'						111,350