

SWC of 19th Ave

PACHECO ST.

19TH AVE

Pacheco

A:126+40.12, 85.44 L
 5.67(E)

A:126+13.89, 85.40 L
 5.95C(E)
 5.65G(E)

A:126+13.90, 80.07 L


(A) $5' \times 20' = 100$ sf
 (B) $20' \times 56' = 1,120$ sf
 (C) $\frac{1}{2} \times 5' \times 18' = 45$ sf
 (D) $\frac{1}{2} \times 16' \times 16' = 128$ sf
 (E) $11' \times 103' = 1,133$ sf

Total = 2,526 SF

CR-2, Hot Mix AC

41.82 Tons

See attached AC Tags

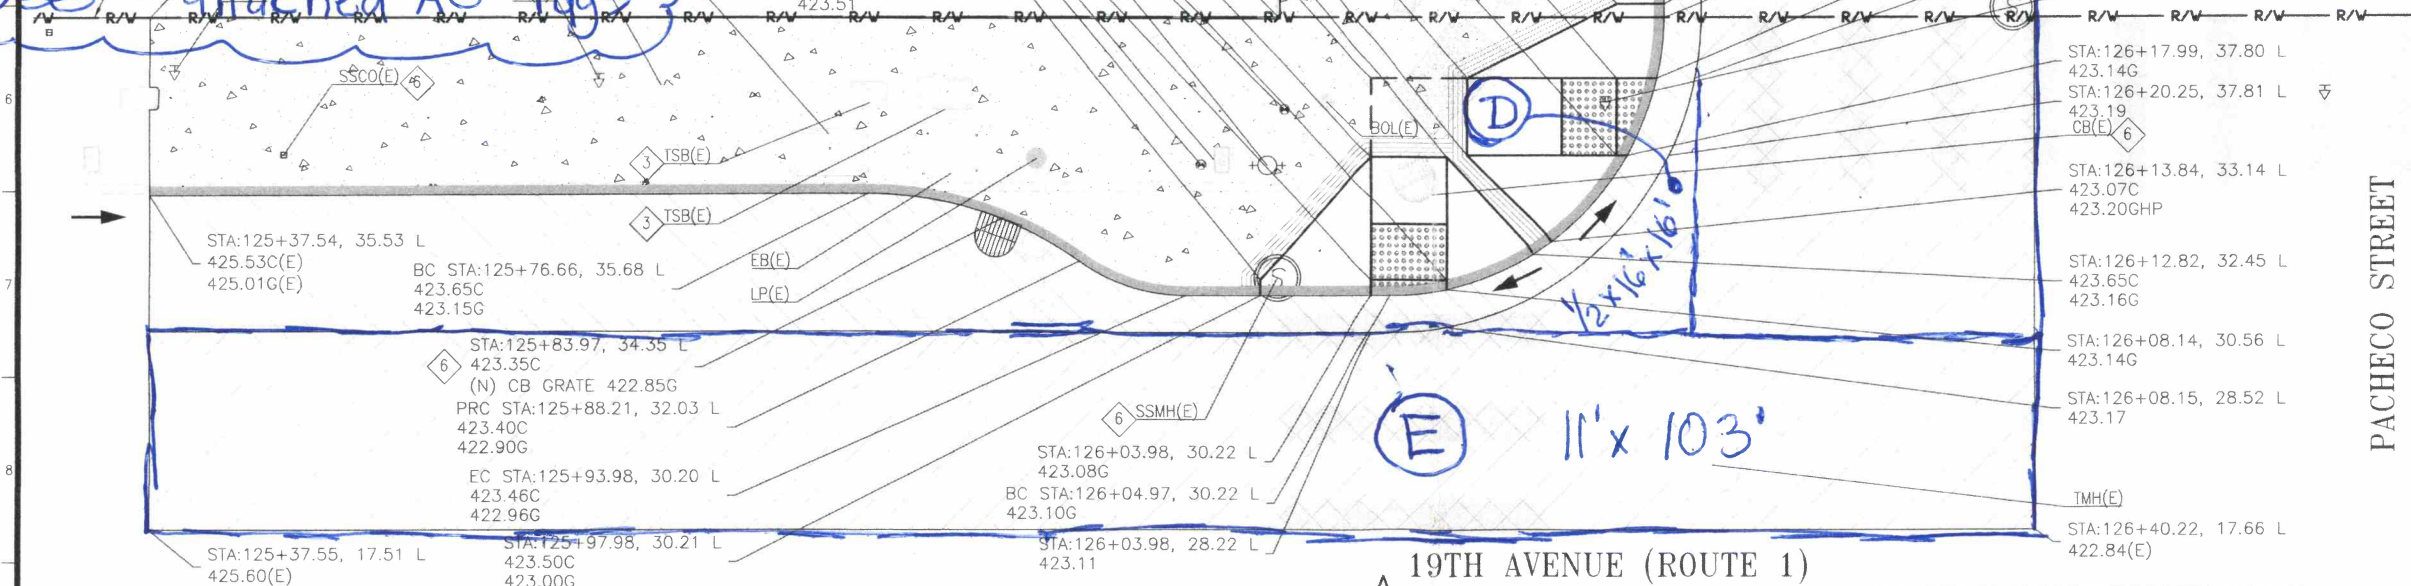

◆ NOTES:

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS BM10152 PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO MA-DWGS IN PLAN SET FOR AWWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO CONSTRUCTION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262.
10. PROPERTY LINE IS APPROXIMATE AND BASED ON THE LATEST GRADE MAP INFORMATION OBTAINED FROM THE CITY & COUNTY OF SAN FRANCISCO DEPARTMENT OF PUBLIC WORKS (SDFPW) WEBSITE: "<http://bsm.sfdpw.org/SUBDIVISION/KEYMAP/>".
11. FACE OF CURB RADIUS AS NOTED.
12. ADJUST CB GRATE HORIZONTALLY TO NEW CURB ALIGNMENT.
13. CONTRACTOR SHALL VERIFY IN FIELD (E) ELEVATIONS & SLOPES PRIOR TO CONSTRUCTION.
14. CONTRACTOR TO ADJUST (E) ELEVATION TO OBTAIN A MAXIMUM 1.5% SIDEWALK CROSS SLOPE.
15. CONTACT BUREAU OF STREET USE AND MAPPING TO COORDINATE MODIFICATION OF MONUMENT PRIOR TO CONSTRUCTION.
16. CONSTRUCT DRIVEWAY PER CITY OF SAN FRANCISCO STANDARD PLAN FILE NO. 87.171.


AECOM

300 California Street, Suite 600
San Francisco, Ca 94104
Tel: 415-796-8100
Fax: 415-796-8200

PROJECT CONTROL BASE LINE

126+00

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	R0.94/4.05

19		SCALE:	1" = 5'	19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT	CONTRACT ID. 1000005832
		SHEET OF SHEETS	65 OF 356	19TH AVENUE AND PACHECO STREET CONSTRUCTION DETAILS	DRAWING NO. C-21B
19					FILE NO. 111,362
19					REV. NO.

[illegible]

SAN FRANCISCO
PUBLIC
WORKS

BUREAU OF ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

Acting Section Mgr	ERIC KJELSBORG	Date:	
	<i>Eric Kjelsberg</i>		12/13/11
Deputy Bureau Mgr	FERNANDO CISNEROS		
	<i>Fab Cisneros</i>		12/16/11
Acting Bureau Mgr	IOBAL DHAPA		
	<i>I Dapa</i>		12/16/11

DESIGNED:	DATE:
A. ELSAEI	02/1
DRAWN:	DATE:
B. CARPENTER	02/1
CHECKED:	DATE:
T. SWEET	02/1



SCALE:
1" = 5'

SHEET OF SHEETS
65 OF 356

19TH AVENUE (STATE ROUTE 1)
COMBINED CITY PROJECT

19TH AVENUE AND PACHECO STREET CONSTRUCTION DETAILS

CONTRACT ID.	1000005832
DRAWING NO.	C-21B
FILE NO.	111,362
REV. NO.	

Drawing Path: \\158sr-w2403.usie.uic.edu\efdpw\19th_avenue\Street\DEI_1BD.dwg
 User: jason.yee
 Login: jason.yee
 Measurement Units are English
 Time: Fri, 06 Dec 2019 - 11:11am