


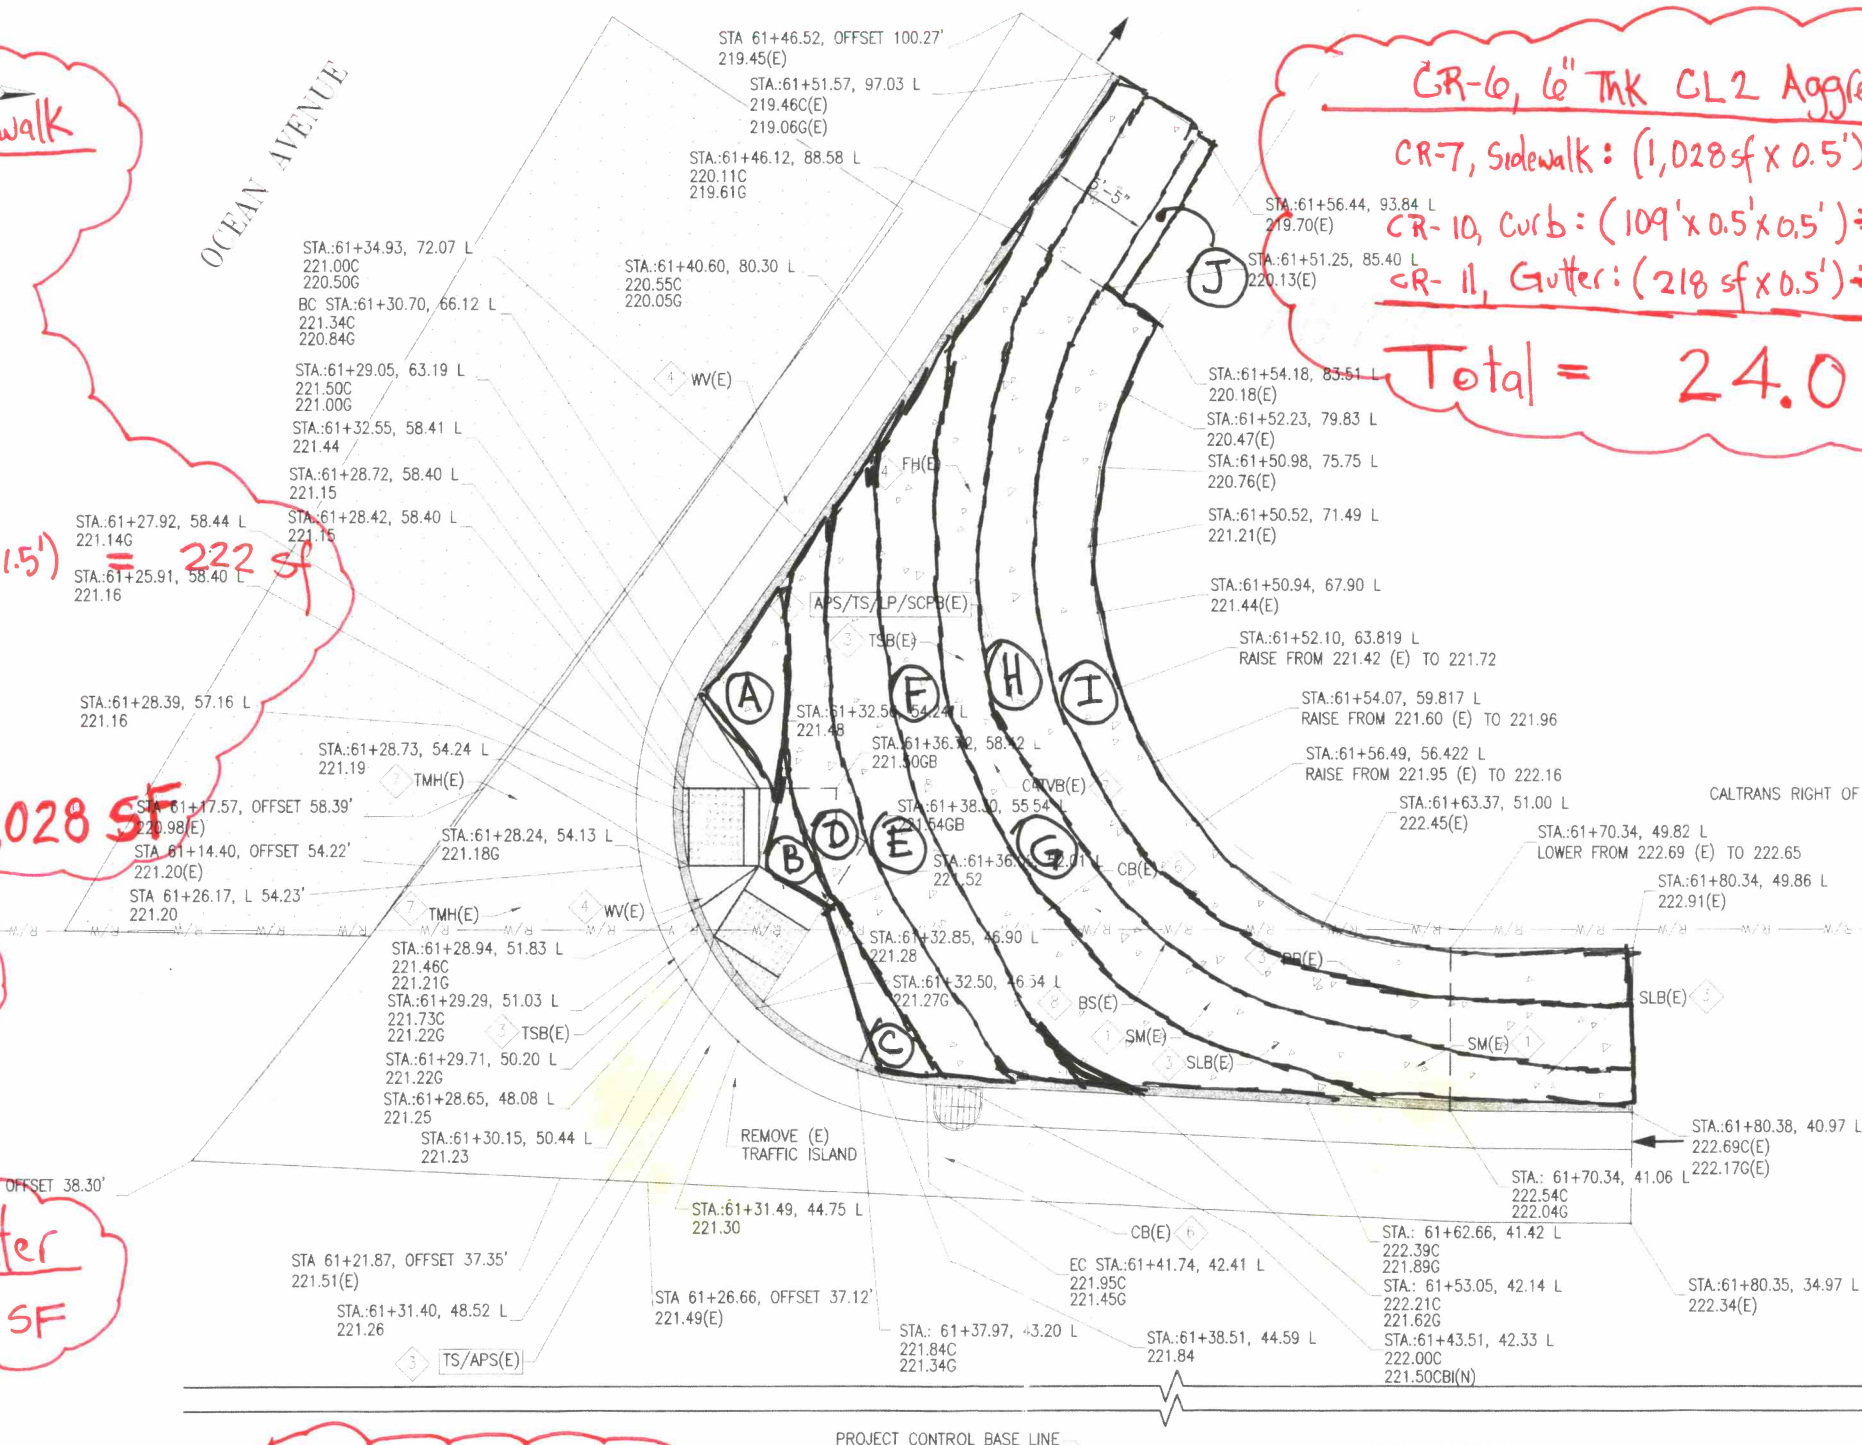
NWC 19th & Ocean

CR-12 Curb Ramp
2 eq



PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	R0.94/4.05

	SCALE	19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT	CONTRACT ID. 1000005832
	1" = 5'		DRAWING NO. C-9D
	SHEET OF SHEETS	19TH AVENUE AND OCEAN AVENUE CONSTRUCTION DETAILS	FILE NO. 111.338
	41 OF 356		REV. NO.

[illegible]

CR-6, 6" THK CL2 Aggregate Base

CR-7, Sidewalk: $(1,028 \text{ sf} \times 0.5') \div 27 = 19.0 \text{ CY}$

$$CR-10, \text{ curb} = (109' \times 0.5' \times 0.5') \div 27 = 1.0 \text{ CY}$$

CR- 11, Gutter: $(218 \text{ sf} \times 0.5') \div 27 = 4.0 \text{ CY}$

$$|T_{\text{Total}}| = 24.0 \text{ C}^\circ$$

NOTES:

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS 294 AND BM10144, PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER, CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-252.
10. REMOVE (E) L/S AND REPLACE WITH SIDEWALK CONFORMING TO CALTRANS STANDARDS.
11. (E) ELEVATIONS ARE BASED ON SURVEY INFORMATION RECEIVED FROM SFPDW ON 10/26/2018. CONTRACTOR SHALL VERIFY CONFORM ELEVATIONS IN FIELD PRIOR TO CONSTRUCTION.
12. REFER TO PD-DWGS IN PLAN SET FOR ALL PAVEMENT MARKINGS, AND STRIPING LAYOUT.

KEY MAP
SCALE: N.T.S.



19TH AVE



Drawing Path: P:\3445_19th Avenue Cuts Ramps\3_Dwg\CO_90.Dwg, Layer: 000
 Plot Time: Wed, 11 Dec 2019 - 10:47:00
 Dimension Scale: 3
 Model Units: Feet
 Xrefs: P:\3445_19th Avenue Cuts Ramps\3_Dwg\Xrefs\A-TTB-7652.dwg
 P:\3445_19th Avenue Cuts Ramps\3_Dwg\Xrefs\A-TTB-7652.dwg
 P:\3445_19th Avenue Cuts Ramps\3_Dwg\Xrefs\A-TTB-7652.dwg