

7/5/22, 9:00 AM
1110 Ortega St

JUNE 2022

Sht 2 of 2

CR-6, 6" Thick CL2 Aggregate Base

CR-5, Base Pad: $(0.5' \times 650 \text{ sf}) \div 27 = 12.0 \text{ CY}$


CR-7, Sidewalk: $(0.5' \times 1,430 \text{ sf}) \div 27 = 26.5 \text{ CY}$

CR-9, Sidewalk: $(0.5' \times 555 \text{ sf}) \div 27 = 10.3 \text{ CY}$

CR-10, Curb: $(0.5' \times 0.5' \times 172') \div 27 = 1.6 \text{ CY}$

CR-11, Gutter & Parking Strip: $(0.5' \times 354 \text{ sf}) \div 27 = 6.6 \text{ CY}$

Total = 57.0 CY

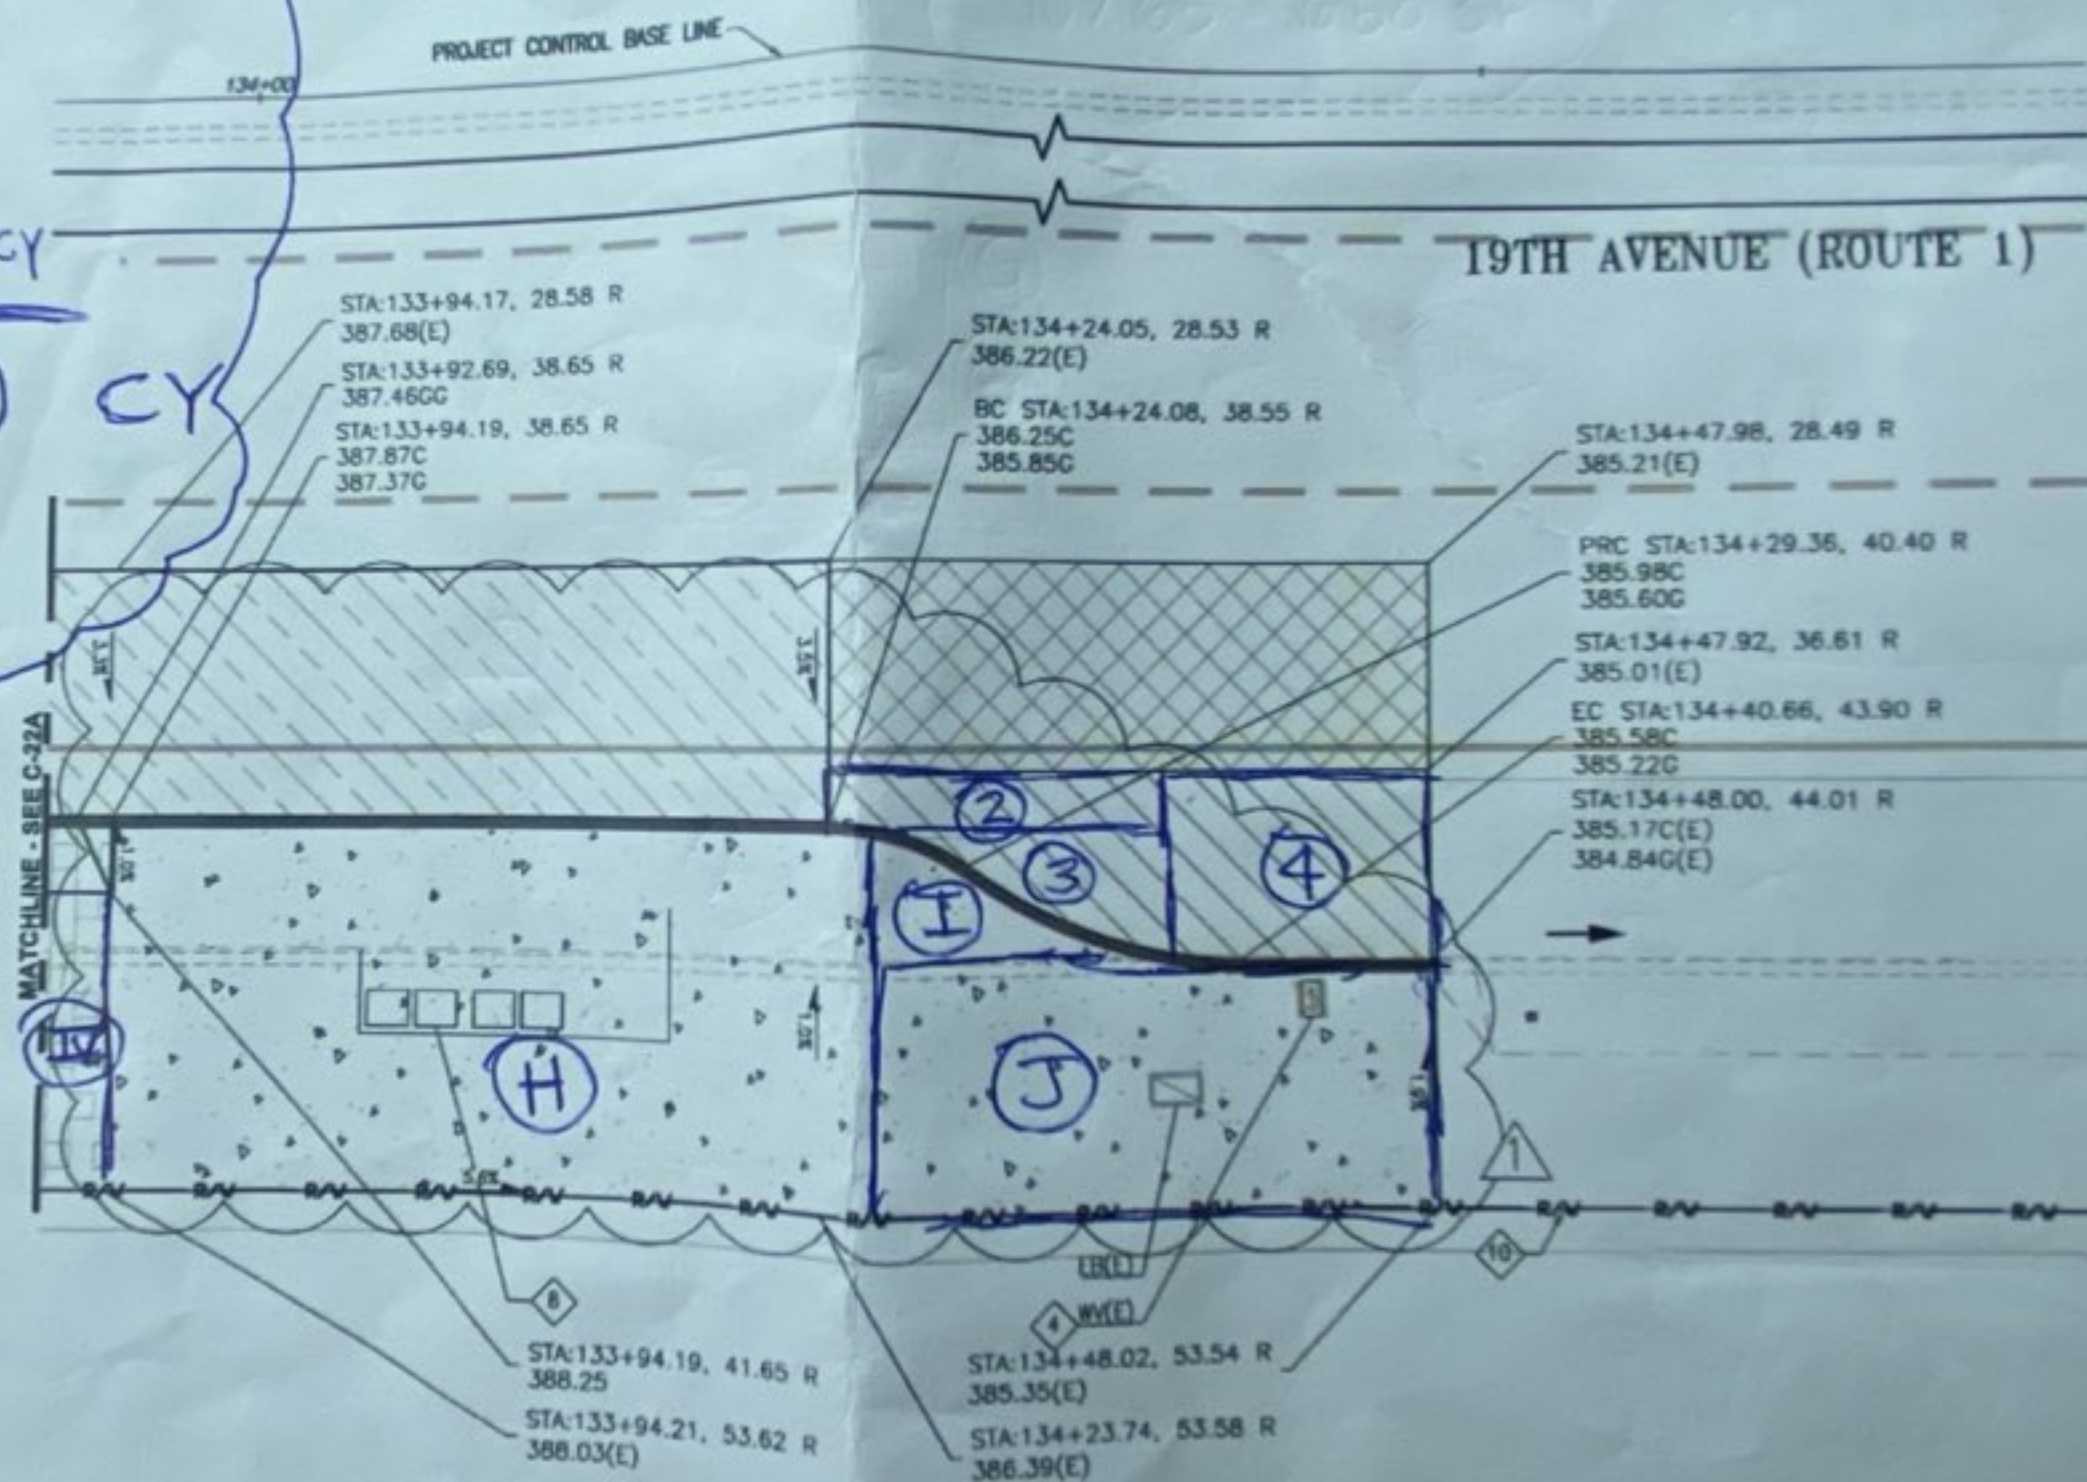

KEY MAP
SCALE 1/4\"/>

NOTES:

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH WAKE DORMING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO CONSTRUCTION.
3. REFER TO E-DIGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DIGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO SW-DIGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SH-DIGS IN PLAN SET FOR SLOPE RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO CONSTRUCTION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262.
10. PROPERTY LINE IS APPROXIMATE AND BASED ON THE LATEST GRADE MAP INFORMATION OBTAINED FROM THE CITY & COUNTY OF SAN FRANCISCO DEPARTMENT OF PUBLIC WORKS (DPW) WEBSITE: "HTTP://WWW.SFPDWP.ORG/SUBMISSION/KEYMAP/".
11. FACE OF CURB RADIUS IS NOTED.
12. ADJUST CB GRATE HORIZONTALLY TO NEW CURB ALIGNMENT.
13. CONTRACTOR SHALL VERIFY IN FIELD (C) ELEVATIONS & SLOPES PRIOR TO CONSTRUCTION.
14. CONTRACTOR TO ADJUST (E) ELEVATION TO OBTAIN A MINIMUM 1.5% SIDEWALK CROSS SLOPE.
15. CONTACT BUREAU OF STREET USE AND MAPPING TO COORDINATE MODIFICATION OF MONUMENT PRIOR TO CONSTRUCTION.
16. CONSTRUCT DRIVEWAY PER CITY OF SAN FRANCISCO STANDARD PLAN FILE NO. 87.171.

AECOM

300 California Street, Suite 800
San Francisco, Ca 94104
Tel: 415-796-8100
Fax: 415-796-8200

REFER TO FILE NO. 111,364
REVISION 0 FOR MANAGEMENT
SIGNATURES

NO.	DATE	ADDED SLOPE FIGURES	DESCRIPTION	BY	APP
1	1/20			JY	TS
THIS DRAWING WAS LAST MODIFIED 01/24/20 09:35, BY: jaym.pw					

REFERENCE INFORMATION
& FILE NO. OF SURVEYS



BUREAU OF ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 10TH FLOOR
SAN FRANCISCO, CA 94102-6028

Acting Section Mgr. ERIC K. JENSEN
Deputy Bureau Mgr. FERNANDO CISNEROS
Acting Bureau Mgr. ISRAEL DHARMA

DESIGNED: DATE: A. EHSAD 10/19
DRAWN: DATE: B. CARPENTER 10/19
CHECKED: DATE: T. SWEET 10/19

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	RO.94/4.05
19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT						CONTRACT NO. 1000005832 DRAWING NO. C-228 FILE NO. 111,364 REV. NO. 1
19TH AVENUE AND ORTEGA STREET CONSTRUCTION DETAILS						