


NOTES

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS 294 AND BM10144, PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. FOR PARKING METER (PM) REMOVAL, REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262.



CR-7, 3 1/2 Thk Sidewalk

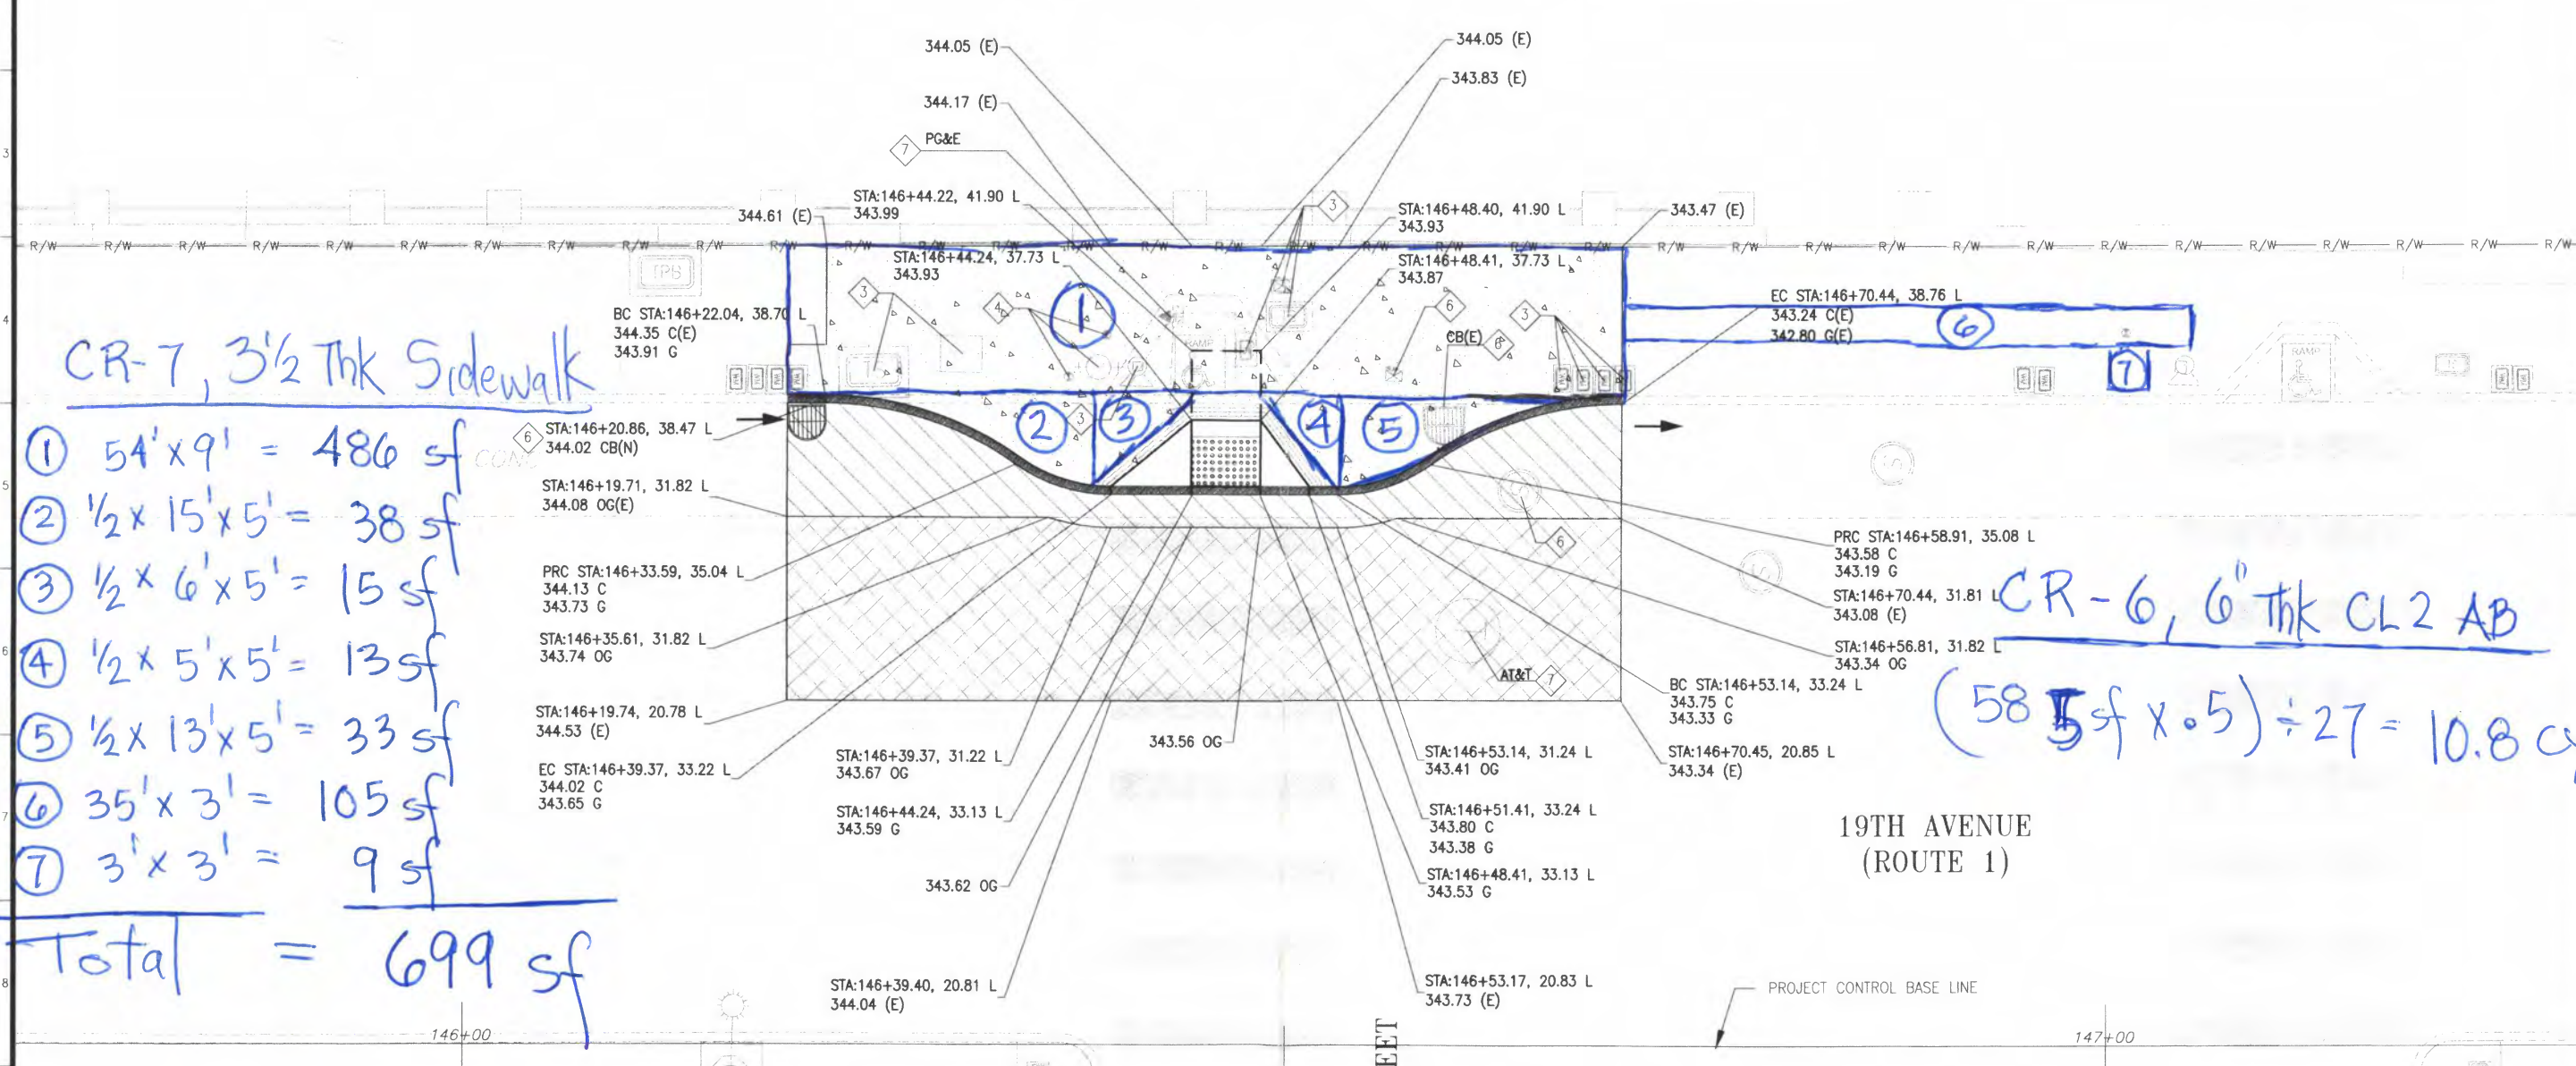

- ① 54' x 9' = 486 sf
- ② 1/2 x 15' x 5' = 38 sf
- ③ 1/2 x 6' x 5' = 15 sf
- ④ 1/2 x 5' x 5' = 13 sf
- ⑤ 1/2 x 13' x 5' = 33 sf
- \* ⑥ 35' x 3' = 105 sf
- \* ⑦ 3' x 3' = 9 sf

Total = 699 sf

CR-6, 6' Thk CL2 AB

$(58 \text{ sf} \times 0.5) \div 27 = 10.8 \text{ cy}$

\* Sidewalk areas noted with "\*" were poured by Phoenix Electric Co.

REFERENCE INFORMATION & FILE NO. OF SURVEYS						BUREAU OF ENGINEERING CITY & COUNTY OF SAN FRANCISCO SAN FRANCISCO PUBLIC WORKS 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028		Acting Section Mgr: ERIC KJELSBERG Date: 12/13/19 Designed: J. MUNOZ 12/19 Drawn: J. MUNOZ 12/19 Checked: C. YU 12/19 Acting Bureau Mgr: IQBAL DHAPA		PLAN APPROVAL DATE		CONTRACT No. 04-0G3501	PROJECT ID 0400000325	DISTRICT 04	COUNTY SF	ROUTE 1	POST MILES TOTAL PROJECT R0.94/4.05	CONTRACT ID. 1000005832	DRAWING NO. C-25B	FILE NO. 111,370	REV. NO.
TABLE OF REVISIONS		19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT																			
THIS DRAWING WAS LAST MODIFIED: 12/11/19 14:41, BY: jmunoz		19TH AVENUE AND MORAGA STREET CONSTRUCTION DETAIL																			

AUGUST 2021