


◆ NOTES:

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING DEPARTMENT OF TECHNOLOGY, AT (415) 550-2771 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO MA-DWGS IN PLAN SET FOR AMSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO CONSTRUCTION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262.
10. PROPERTY LINE IS APPROXIMATE AND BASED ON THE LATEST GRADE MAP INFORMATION OBTAINED FROM THE CITY & COUNTY OF SAN FRANCISCO DEPARTMENT OF PUBLIC WORKS (SPDPW) WEBSITE: "<http://BSM.SPDPW.ORG/SUBDIVISION/KEYMAP/>." FACE OF CURB RADIUS AS NOTED.
11. ADJUST CB CURB HORIZONTALLY TO NEW CURB ALIGNMENT.
12. CONTRACTOR SHALL VERIFY IN FIELD (E) ELEVATIONS & SLOPES PRIOR TO CONSTRUCTION.
13. CONTRACTOR TO ADJUST (E) ELEVATION TO OBTAIN A MAXIMUM 1.5% SIDEWALK CROSS SLOPE.
14. CONTACT BUREAU OF STREET USE AND MAPPING TO COORDINATE MODIFICATION OF MONUMENT PRIOR TO CONSTRUCTION.
15. CONSTRUCT DRIVEWAY PER CITY OF SAN FRANCISCO STANDARD PLAN FILE NO. 87.171.

Total 54.60 ton

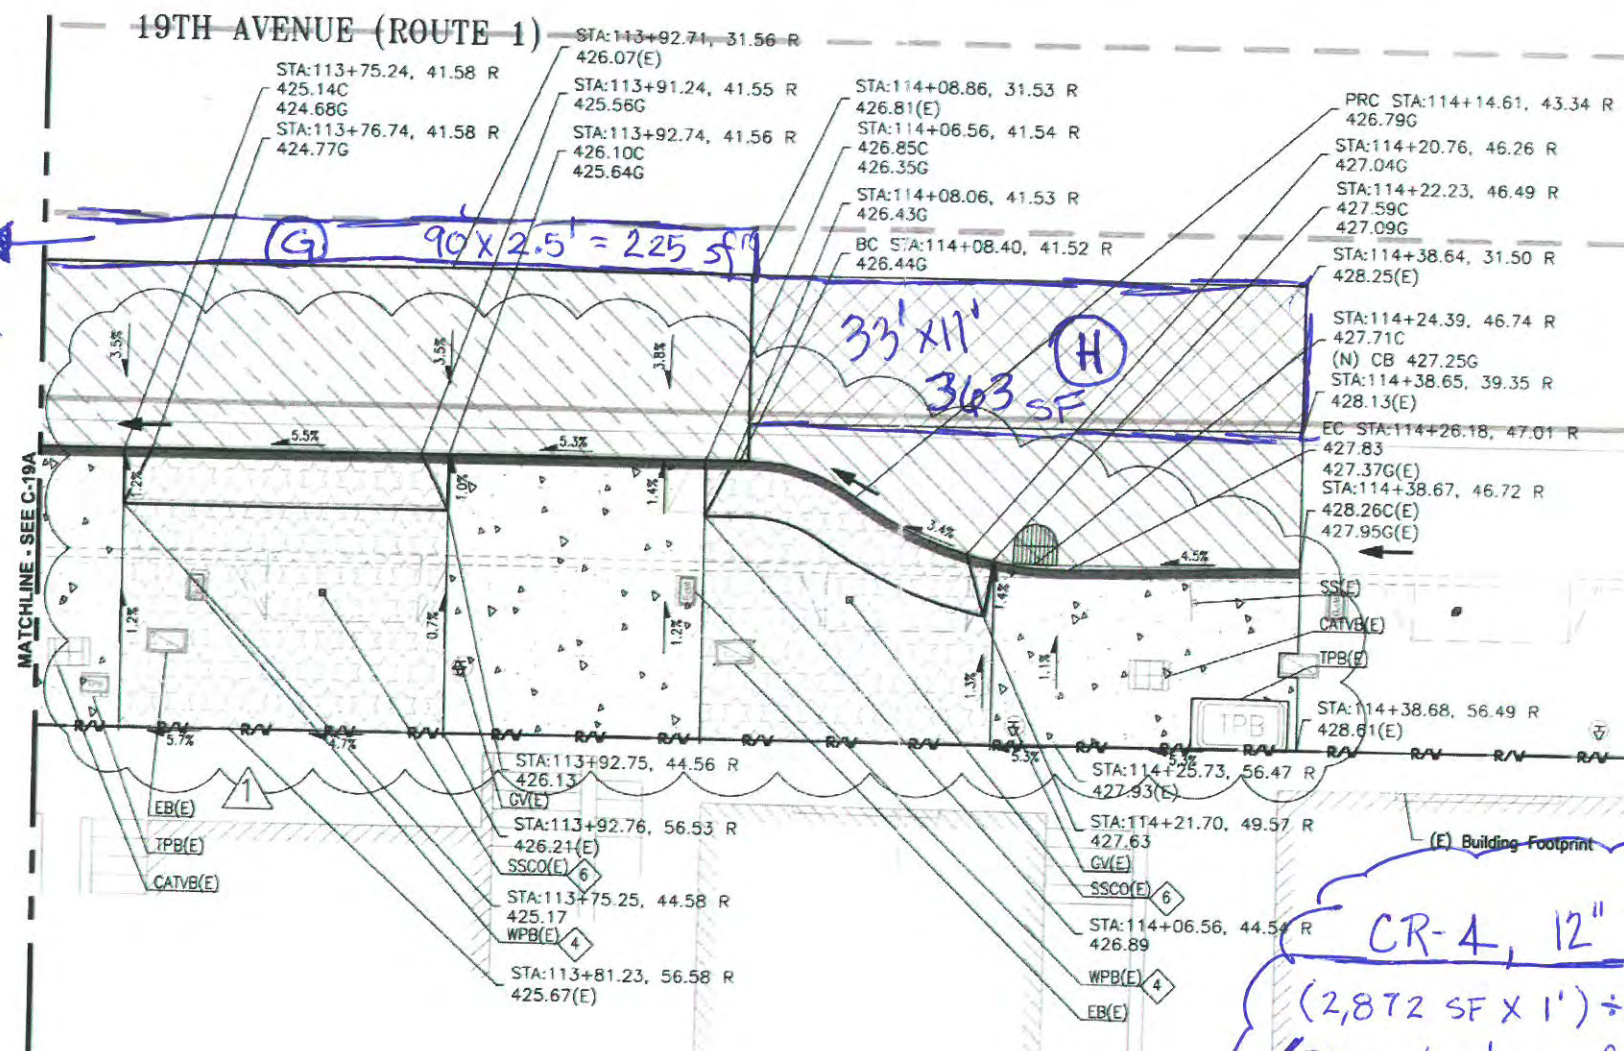

CR-4, 12" Thick Aggregate Base

$$(2,872 \text{ SF} \times 1') \div 27 = 106.4 \text{ CY}$$

(RKE placed one foot of aggregate base along ~~XXXXXX~~ Rivera because that they were not informed that it was not required on Rivera)


REFER TO FILE NO. 111,355  
REVISION 0 FOR MANAGEMENT  
SIGNATURES



TABLE OF REVISIONS  
THIS DRAWING WAS LAST MODIFIED: 01/23/20 15:34, BY: jason.yee



DESIGNED:	DATE:
A. ELSAEI	10/19
DRAWN:	DATE:
B. CARPENTER	10/19
CHECKED:	DATE:

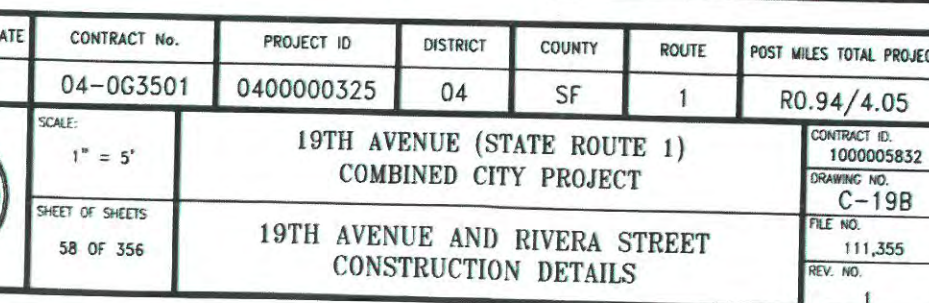

Drawing Path: \\157BSR-W2\K03\TechDraw\SFDPW 19th Avenue\Sheet\5 - 19B.dwg, Joojin.jac  
Plot Time: Fri, 24 Jan 2020 - 9:40am  
Measurements: Units and English  
Dimension Scale: 5  
Model Units: Undefined