

7/5/22, 8:58 AM
1110 Ortega St

JUNE 2022

Sht 2 of 2

CR-4, 12" Thick CL2 Aggregate Base


$$(27' \times 19' \times 1') \div 27 = 19.0 \text{ CY}$$

$$(1/2 \times 16' \times 16' \times 1') \div 27 = 4.7 \text{ CY}$$

$$(11' \times 24' \times 1') \div 27 = 9.8 \text{ CY}$$

$$(11' \times 56' \times 1') \div 27 = 22.8 \text{ CY}$$

Total = 56.3 CY

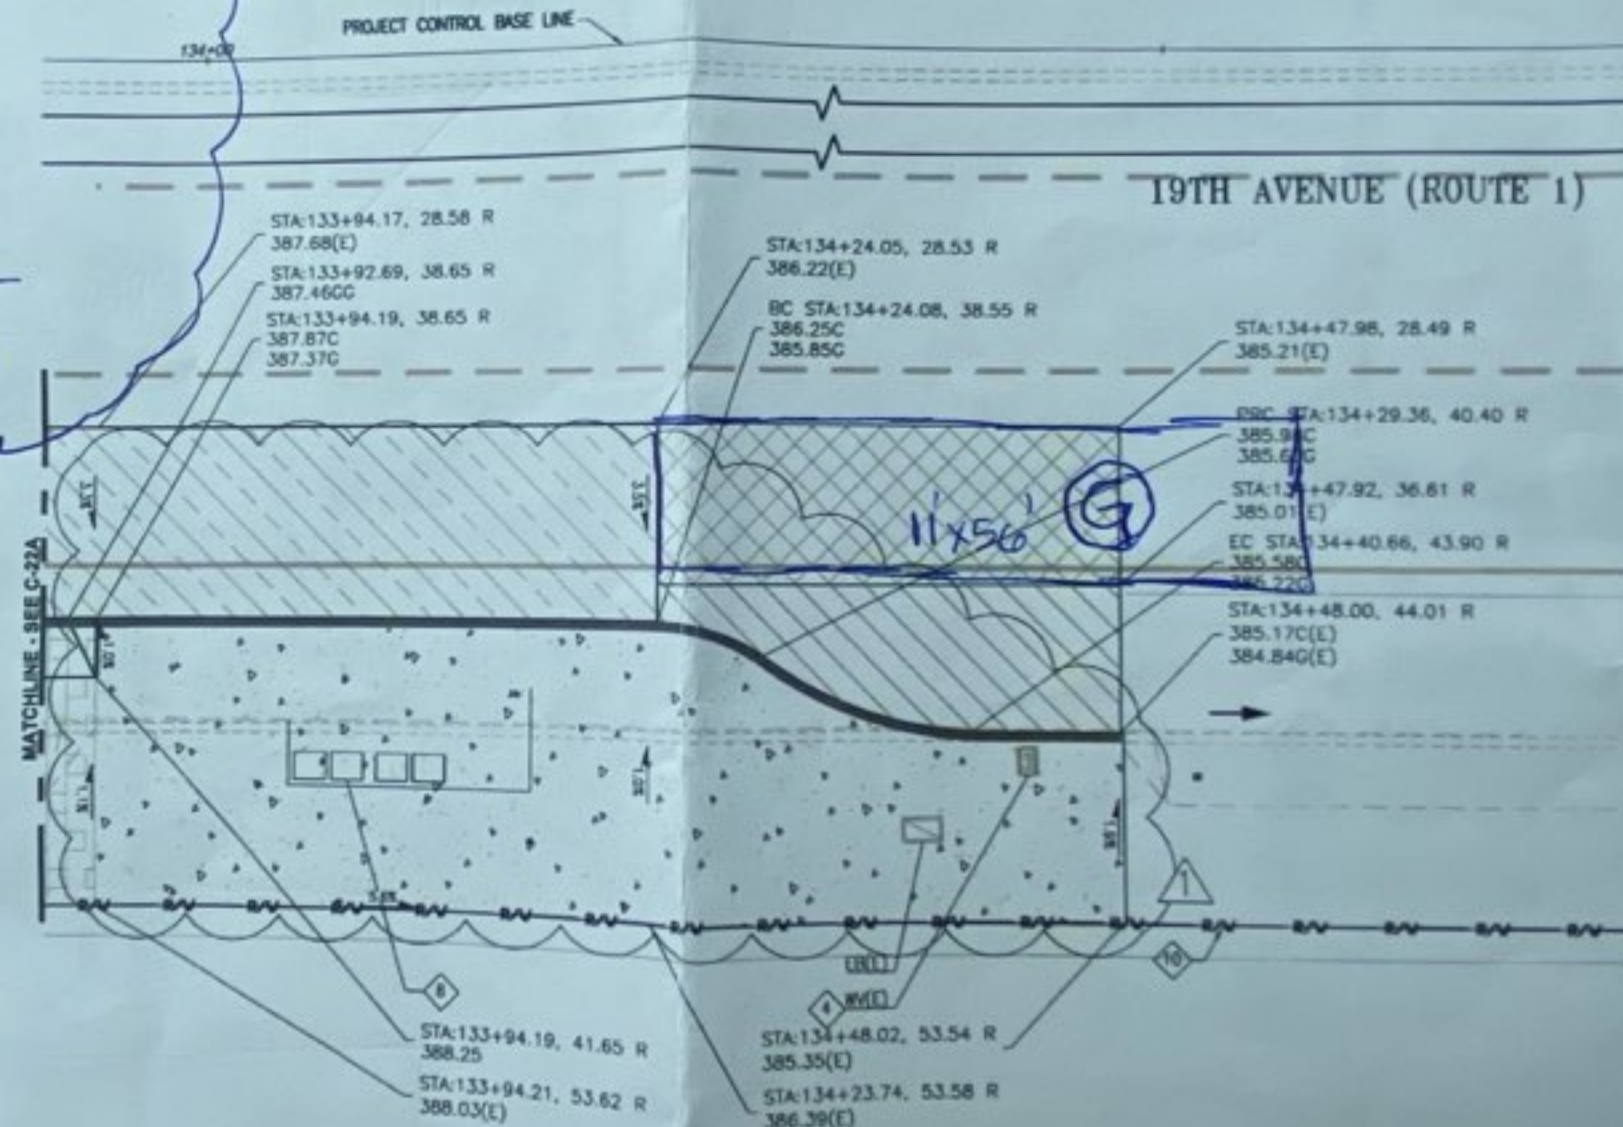

KEY MAP
SCALE: N.T.S.

NOTES:

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH FIRE DEPARTMENT, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO MD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO SA-DWGS IN PLAN SET FOR AMSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER, CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO CONSTRUCTION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATION PRIOR TO CONSTRUCTION.
9. PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262.
10. PROPERTY LINE IS APPROXIMATE AND BASED ON THE LATEST GRADE MAP INFORMATION OBTAINED FROM THE CITY & COUNTY OF SAN FRANCISCO DEPARTMENT OF PUBLIC WORKS (DPW) WEBSITE: <http://www.sfpw.org/subdivision/ownmap/>
11. FACE OF CURB RADIUS AS NOTED.
12. ADJUST CB GRATE HORIZONTALLY TO NEW CURB ALIGNMENT.
13. CONTRACTOR SHALL VERIFY IN FIELD (C) ELEVATIONS & SLOPES PRIOR TO CONSTRUCTION.
14. CONTRACTOR TO ADJUST (C) ELEVATION TO OBTAIN A MINIMUM 1.0% SIDEWALK CROSS SLOPE.
15. CONTACT BUREAU OF STREET USE AND MAPPING TO COORDINATE MODIFICATION OF MONUMENT PRIOR TO CONSTRUCTION.
16. CONSTRUCT DRIVEWAY PER CITY OF SAN FRANCISCO STANDARD PLAN FILE NO. 87.171.

AECOM
300 California Street, Suite 800
San Francisco, CA 94104
Tel: 415-796-8100
Fax: 415-796-8200

REFER TO FILE NO. 111,364
REVISION 0 FOR MANAGEMENT
SIGNATURES

NO.	DATE	DESCRIPTION	BY	APP.
1	1/20	ADD SLOPE FIGURES	JY	YS

THIS DRAWING WAS LAST MODIFIED: 01/20/20 08:35, BY: jason.jee

REFERENCE INFORMATION
& FILE NO. OF SURVEYS



BUREAU OF ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102-8028

Acting Section Mgr.: ERIC KUELSBRO
County Bureau Mgr.: FERNANDO OSORIO
Acting Bureau Mgr.: JOBAL CHAPRA

DESIGNED: A. BRAD 10/19
DRAWN: B. CARPENTER 10/19
CHECKED: T. SWEET 10/19

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	RO.94/4.05
19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT						
19TH AVENUE AND ORTEGA STREET CONSTRUCTION DETAILS						



SCALE:
1" = 5'
SHEET OF SHEETS
67 OF 356

CONTRACT NO.: 1000005832
DRAWING NO.: C-228
FILE NO.: 111,364
REV. NO.: 1