



BID ITEM:
E-37 (x1)

SHEET NOTES

- 1 CONTRACTOR TO PROVIDE APS WIRING. CITY FORCES TO PROVIDE APS PUSH BUTTON PER ADA REQUIREMENTS.
- 2 AB PER CALTRANS STANDARD SPECIFICATIONS.
- 3 RS EXISTING CABINET AND CONTROLLER, RC FOUNDATION, ASSOCIATED CONDUITS, AND PULLBOXES.
- 4 RC EXISTING POLE, FOUNDATION, EQUIPMENT, ASSOCIATED CONDUITS, AND PULLBOXES.
- 5 COORDINATE WITH RED LIGHT CAMERA (RLC) ENFORCEMENT MANAGER MONICA GIESE AT (415) 701-2461 AT LEAST TEN (10) WORKING DAYS PRIOR TO START OF WORK FOR SHUTDOWN OF RLC SYSTEM AND RS OF FLASHER UNIT TO NEW POLES.
- 6 CONTACT SFMTA SIGNAL SHOP 5 DAYS PRIOR TO CONSTRUCTION TO RS GTT TRANSIT SIGNAL PRIORITY RADIO EQUIPMENT.
- 7 PROVIDE CONTROLLER FOUNDATION PAD MODEL 332L PER CALTRANS STANDARD PLANS. COORDINATE WITH SFMTA FOR PICK UP OF I/C CABINET.
- 8 RC TRAFFIC SIGNAL EQUIPMENT ON EXISTING STREET LIGHT POLE.
- 9 CONTACT SFMTA SIGNAL SHOP 5 DAYS PRIOR TO CONSTRUCTION TO RS CCTV EQUIPMENT.
- 10 SPLICE INTO EXISTING STREET LIGHT WIRES.
- 11 2 WEEKS PRIOR TO CONSTRUCTION, NOTIFY CALTRANS TO MARK THE ESA CONSTRUCTION LIMITS NEAR THE ENTRANCES OF STERN GROVE AND PINE LAKE PARK.


Pole	Base Plate Data				Cage Size	Foundation Size
	Plate Size	Bolt Circle	Thickness	Anchor Bolt Size		
PPB	7"	7"	1/2"	5/8"x12"	No Cage	18"x18"
15TS	13.5"	12"	2"	1.5"x42"	24"x7'	30"x7'6"
19-2-100	22"	20"	2.5"	2"x42"	36" x 9'6"	42"x10'
26-3-100	25"	23"	3"	2.25"x42"	36"x12'6"	42"x13'
26-4-100	25"	23"	3"	2.25"x42"	36"x12'6"	42"x13'

PHASE DIAGRAM: (STEADY DEMAND)

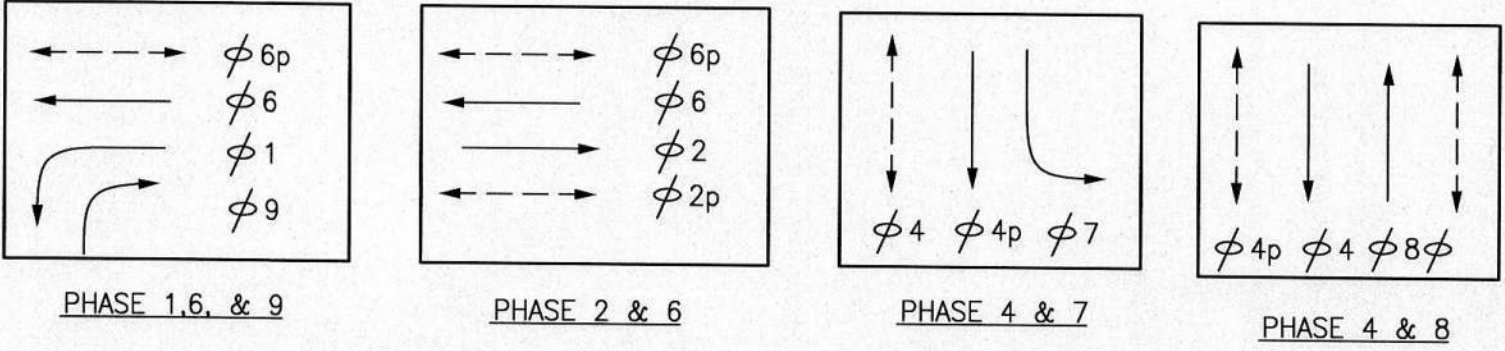

NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
THIS DRAWING WAS LAST MODIFIED: 12/03/19 15:59, BY: dgargaritano				


REFERENCE INFORMATION
& FILE NO. OF SURVEYS

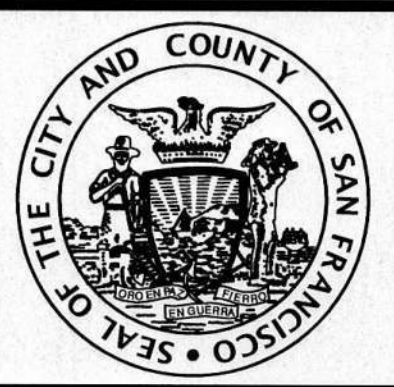

BUREAU OF ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

Acting Section Mgr:	PHILIP THWIN	Date:	12/11/19
Deputy Bureau Mgr:	FERNANDO CISNEROS	Date:	12/16/19
Acting Bureau Mgr:	IQBAL DHAPA	Date:	12/16/19

DESIGNED:	DATE:
KS/DG	02/2018
DRAWN:	DATE:
KS/DG	02/2018
CHECKED:	DATE:
MV/SL	02/2018

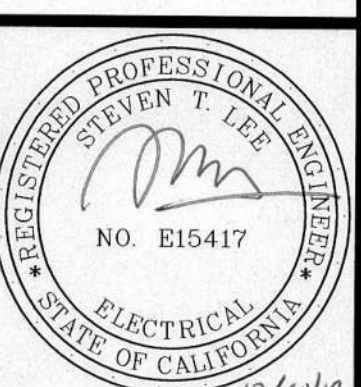

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	R0.94/4.05

19TH AVENUE (STATE ROUTE 1)
COMBINED CITY PROJECT

19TH AVENUE SLOAT BOULEVARD

CONTRACT NO. 1000005832
DRAWING NO. E-5.0
FILE NO. 111,398
REV. NO.