Sht 1 of 5

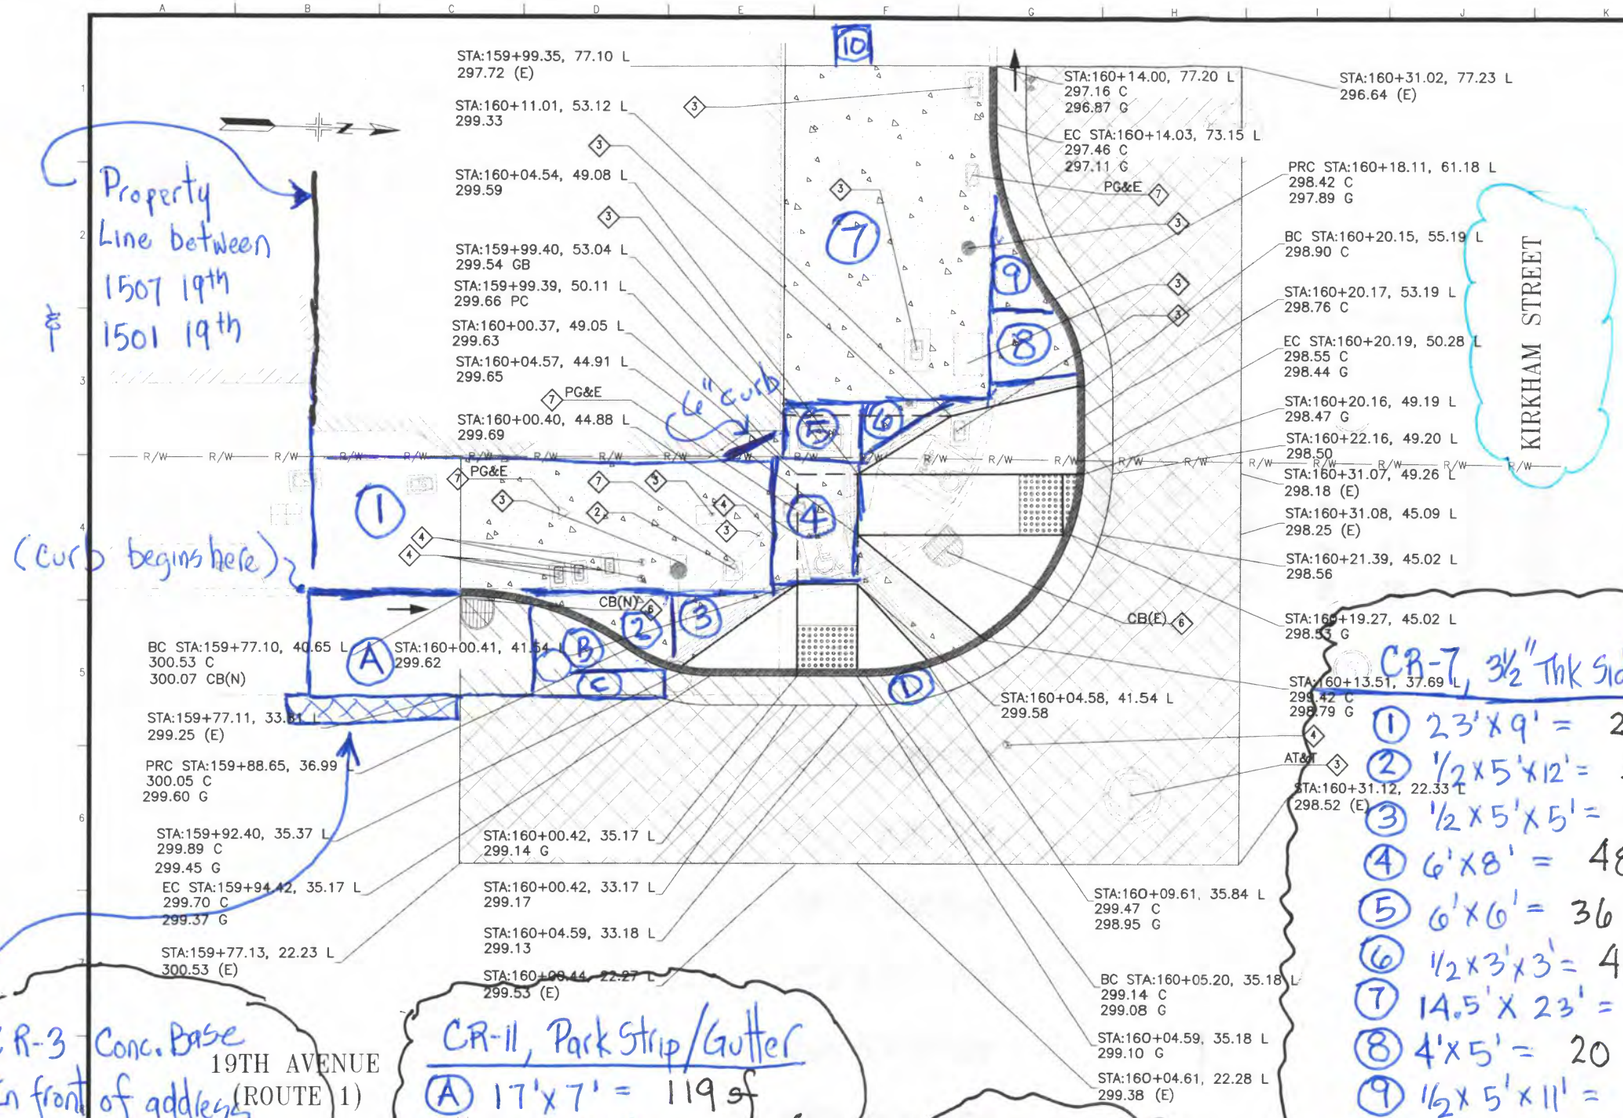

NOTES

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS BM10146 PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. FOR PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262

CR-3 Conc. Base (In front of address 1501 19th)

11' x 2' = 22 sf

CR-11, Park Strip/Gutter

(A) 17' x 7' = 119 sf
(B) 1/2 x 5' x 11' = 27.5 sf
(C) 11' x 2' = 22 sf
(D) 66' x 2' = 132 sf

Total = 301 sf

CR-10, 6" Curb

92' + 4' = 96'

CR-7, 3 1/2" Thk Sidewalk

(1) 23' x 9' = 207 sf
(2) 1/2 x 5' x 12' = 30 sf
(3) 1/2 x 5' x 5' = 12.5 sf
(4) 6' x 8' = 48 sf
(5) 6' x 6' = 36 sf
(6) 1/2 x 3' x 3' = 4.5 sf
(7) 14.5' x 23' = 333.5 sf
(8) 4' x 5' = 20 sf
(9) 1/2 x 5' x 11' = 27.5 sf
(10) 3' x 3' = 9 sf

Total = 728 sf

CR-6, 6" CL2 Aggregate Base

CR-7 s/w: (728 sf x 0.5)/27 = 13.5 CY
CR-11, P.S.: (301 sf x 0.5)/27 = 5.6 CY
CR-10, Curb: (96' x 0.5' x 0.5')/27 = 0.9 CY

Total = 20.0 CY

CR-4, 12" CL2 Aggregate Base

(22 sf x 1.0)/27 = 0.8 CY

CR-12, Curb Ramp

2 ea

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	R0.94/4.05

NO.	DATE	DESCRIPTION	BY	APP.

TABLE OF REVISIONS

THIS DRAWING WAS LAST MODIFIED: 12/12/19 15:25, BY: jmunoz

REFERENCE INFORMATION & FILE NO. OF SURVEYS

SEAL OF THE CITY AND COUNTY OF SAN FRANCISCO

SAN FRANCISCO PUBLIC WORKS

BUREAU OF ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

		Date:
Acting Section Mgr:	ERIC KJELSBERG	12/13/19
Deputy Bureau Mgr:	FERNANDO CISNEROS	12/16/19
Acting Bureau Mgr:	IQBAL DHAPA	12/16/19

DESIGNED:	J.MUNOZ	DATE: 12/19
DRAWN:	J.MUNOZ	DATE: 12/19
CHECKED:	C.YU	DATE: 12/19

REGISTERED PROFESSIONAL ENGINEER CHARLES W. YU No. C 43221 CIVIL STATE OF CALIFORNIA 12/12/19

SCALE: 1" = 5'

SHEET OF SHEETS 79 OF 356

19TH AVENUE (STATE ROUTE 1)
COMBINED CITY PROJECT

19TH AVENUE AND KIRKHAM STREET
CONSTRUCTION DETAIL

CONTRACT ID. 1000005832
DRAWING NO. C-27B
FILE NO. 111,376
REV. NO.

July 2021 by David Barajas

Xrefs: V:\2652J_19th_Avenue_Combined_City_Project\2_Design\Working_Drawings\ESH\Current\2652J_LC-1_LOCATIONS_OF_CONST-WC_M
V:\2652J_19th_Avenue_Combined_City_Project\Official_Project_TBs\DF1_TBD.dwg
V:\2652J_19th_Avenue_Combined_City_Project\2_Design\Working_Drawings\ESH\Current\Base Files\19TH AVE_STATION_ALIGNMENTS.dwg
V:\2652J_19th_Avenue_Combined_City_Project\2_Design\Working_Drawings\ESH\Current\Base Files\X-DSGN-19th Ave Striping.dwg

Drawing Path: V:\2652J_19th_Avenue_Combined_City_Project\2_Design\Working_Drawings\ESH\Current\JM\C-27 Kirkham On-Street.dwg, Login: jmunoz
Plot Time: Thu, 12 Dec 2019 - 3:35pm
Model Units: Feet
Measurement Units are English