


CR-4 CL2 Aggregate Base

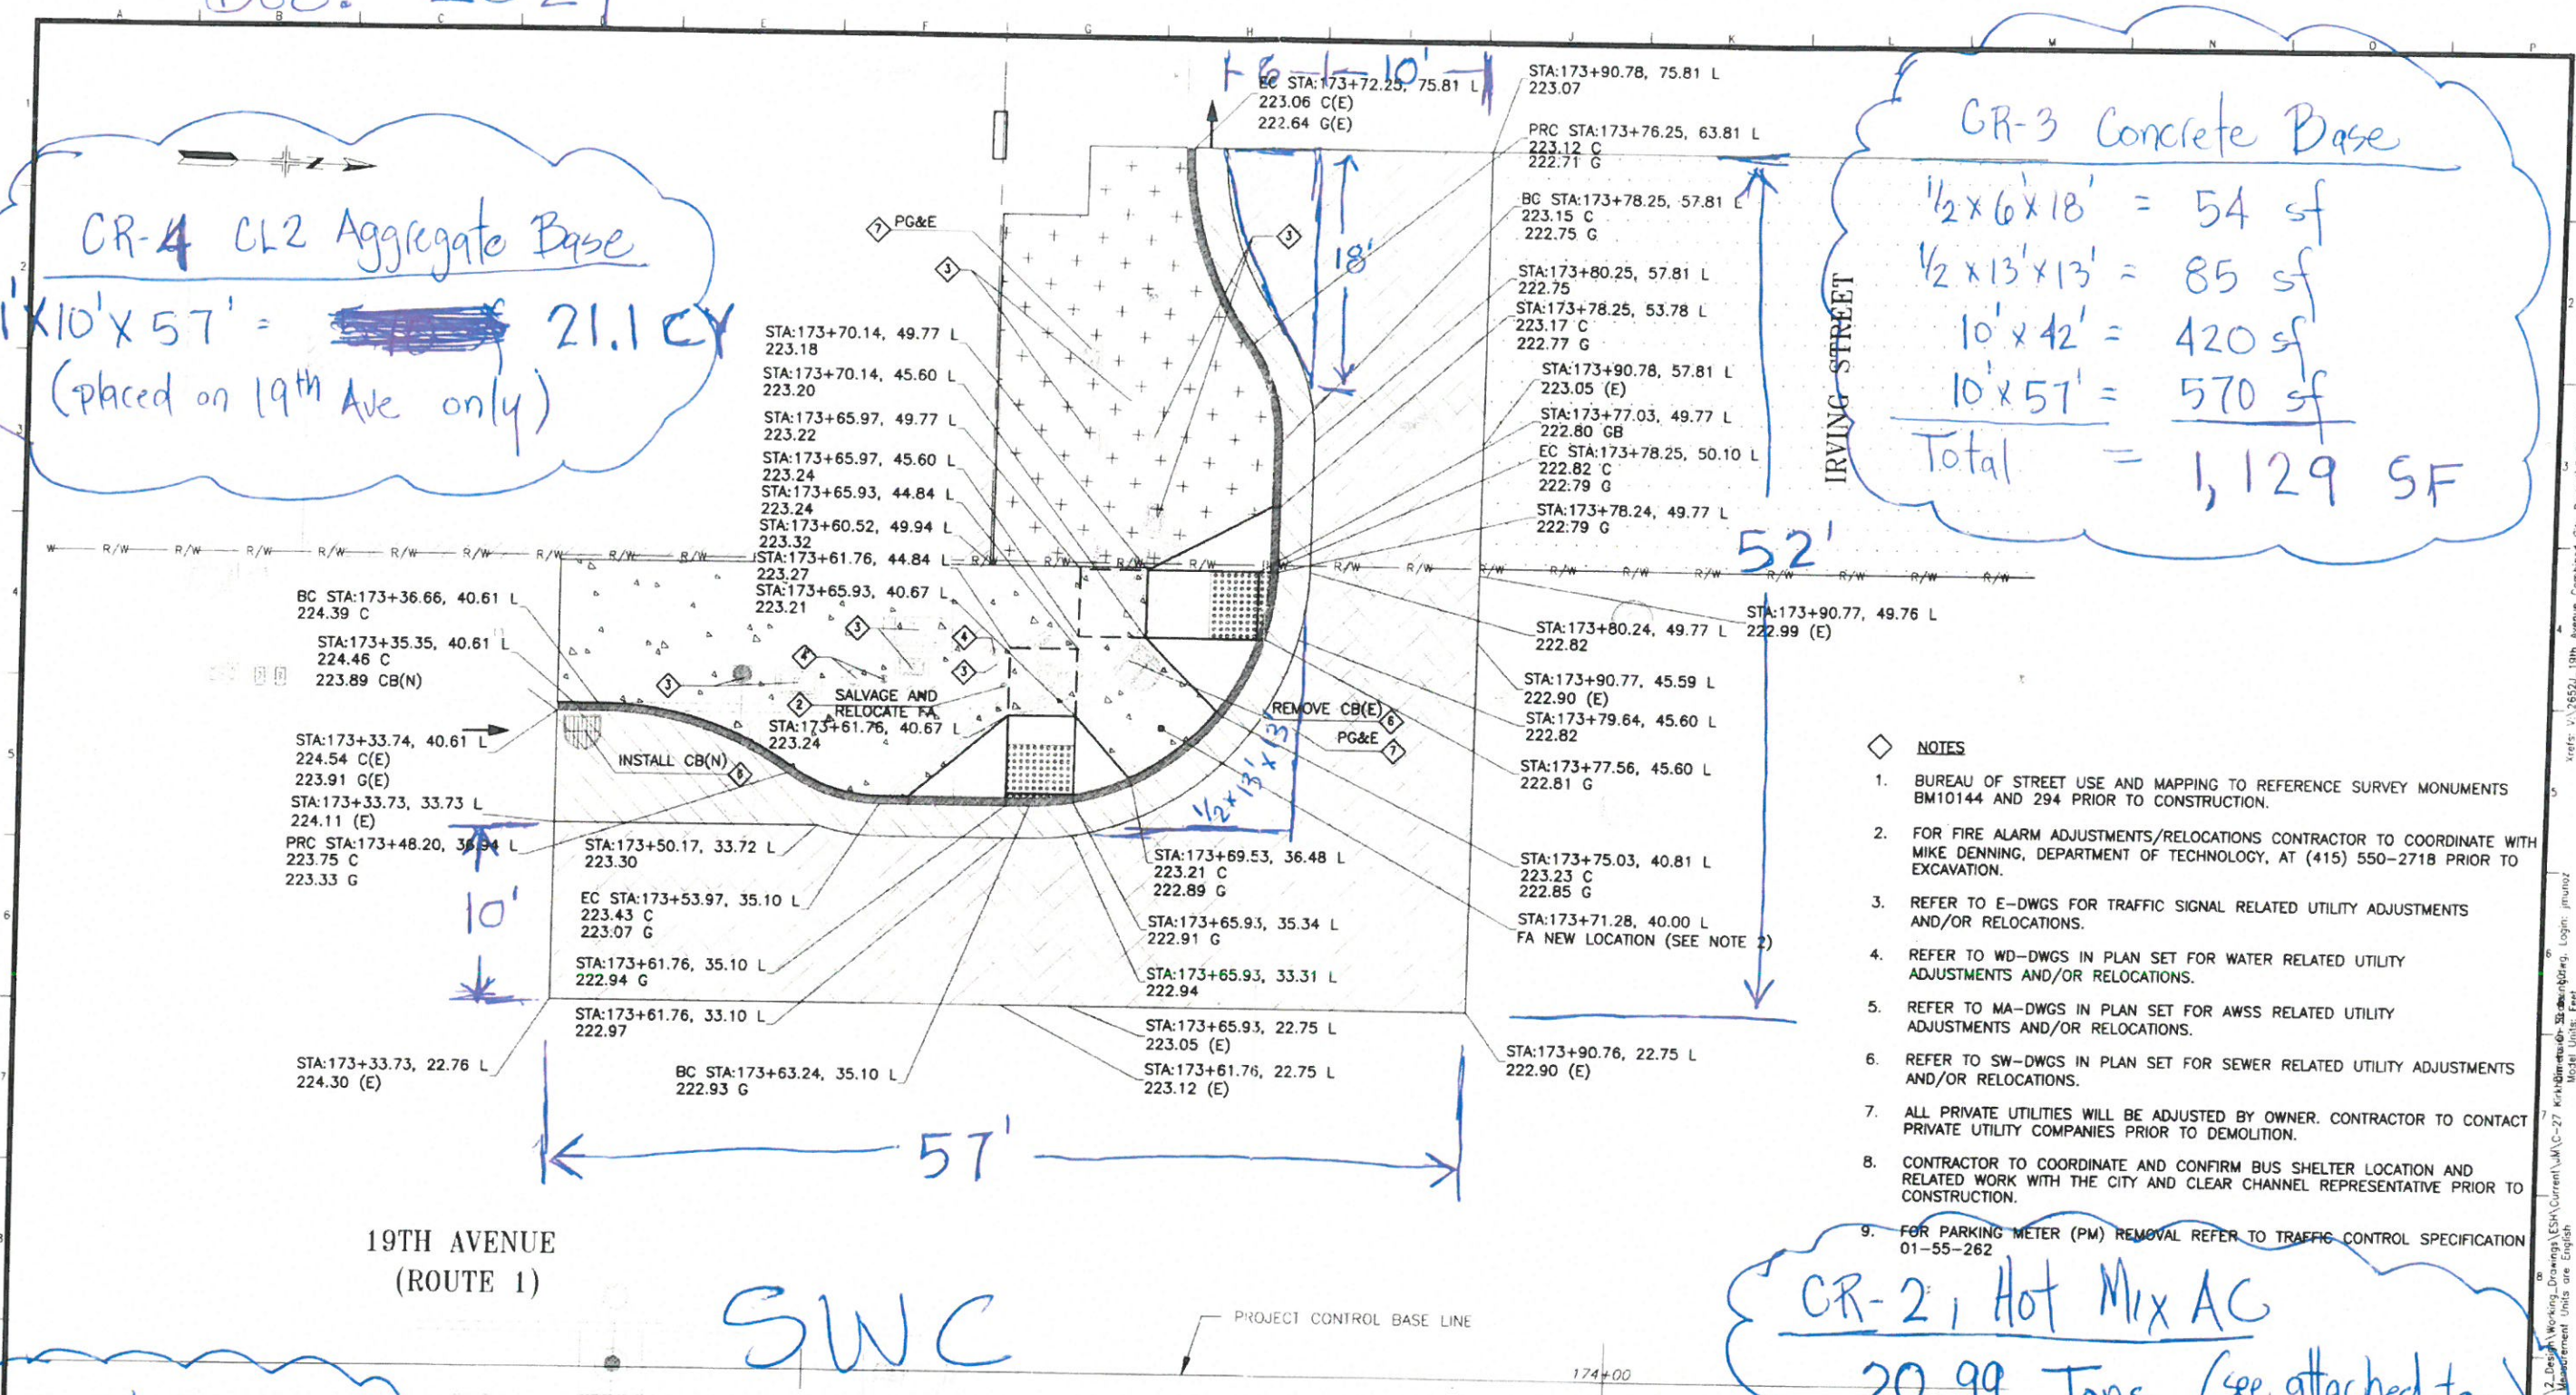


1'x10'x57' = ~~570~~ 21.1 CY
(placed on 19th Ave only)

$$\begin{array}{rcl} \frac{1}{2} \times 6' \times 18' & = & 54 \text{ sf} \\ \frac{1}{2} \times 13' \times 13' & = & 85 \text{ sf} \\ 10' \times 42' & = & 420 \text{ sf} \\ 10' \times 57' & = & 570 \text{ sf} \\ \hline \text{Total} & = & 1,129 \text{ SF} \end{array}$$


Concrete base placed
on 11/30/2021

CR-2, Hot Mix AC
20.99 Tons (see attached tag)

- ◇ NOTES
1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS BM10144 AND 294 PRIOR TO CONSTRUCTION.
 2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
 3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 5. REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
 8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
 9. FOR PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262

										04-0G3501		0400000325		04		SF		1		R0.94/4.05					
										REFERENCE INFORMATION & FILE NO. OF SURVEYS						BUREAU OF ENGINEERING CITY & COUNTY OF SAN FRANCISCO SAN FRANCISCO PUBLIC WORKS 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028		Acting Section Mgr.: ERIC KJELSBERG <i>Eric Kjelberg</i> Date: 12/13/19		DESIGNED: J. MUNOZ 12/19				CONTRACT ID: 1000005832	
																		19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT		DRAWING NO. C-308					
																		19TH AVENUE AND IRVING STREET CONSTRUCTION DETAIL		FILE NO. 111,382					
																				REV. NO.					
NO. DATE DESCRIPTION BY APP.																									
TABLE OF REVISIONS THIS DRAWING WAS LAST MODIFIED: 12/12/19 15:25, BY: jmunoz																									