


7/5/22, 9:00 AM
1110 Ortega St

JUNE 2022

Sht 1 of 2

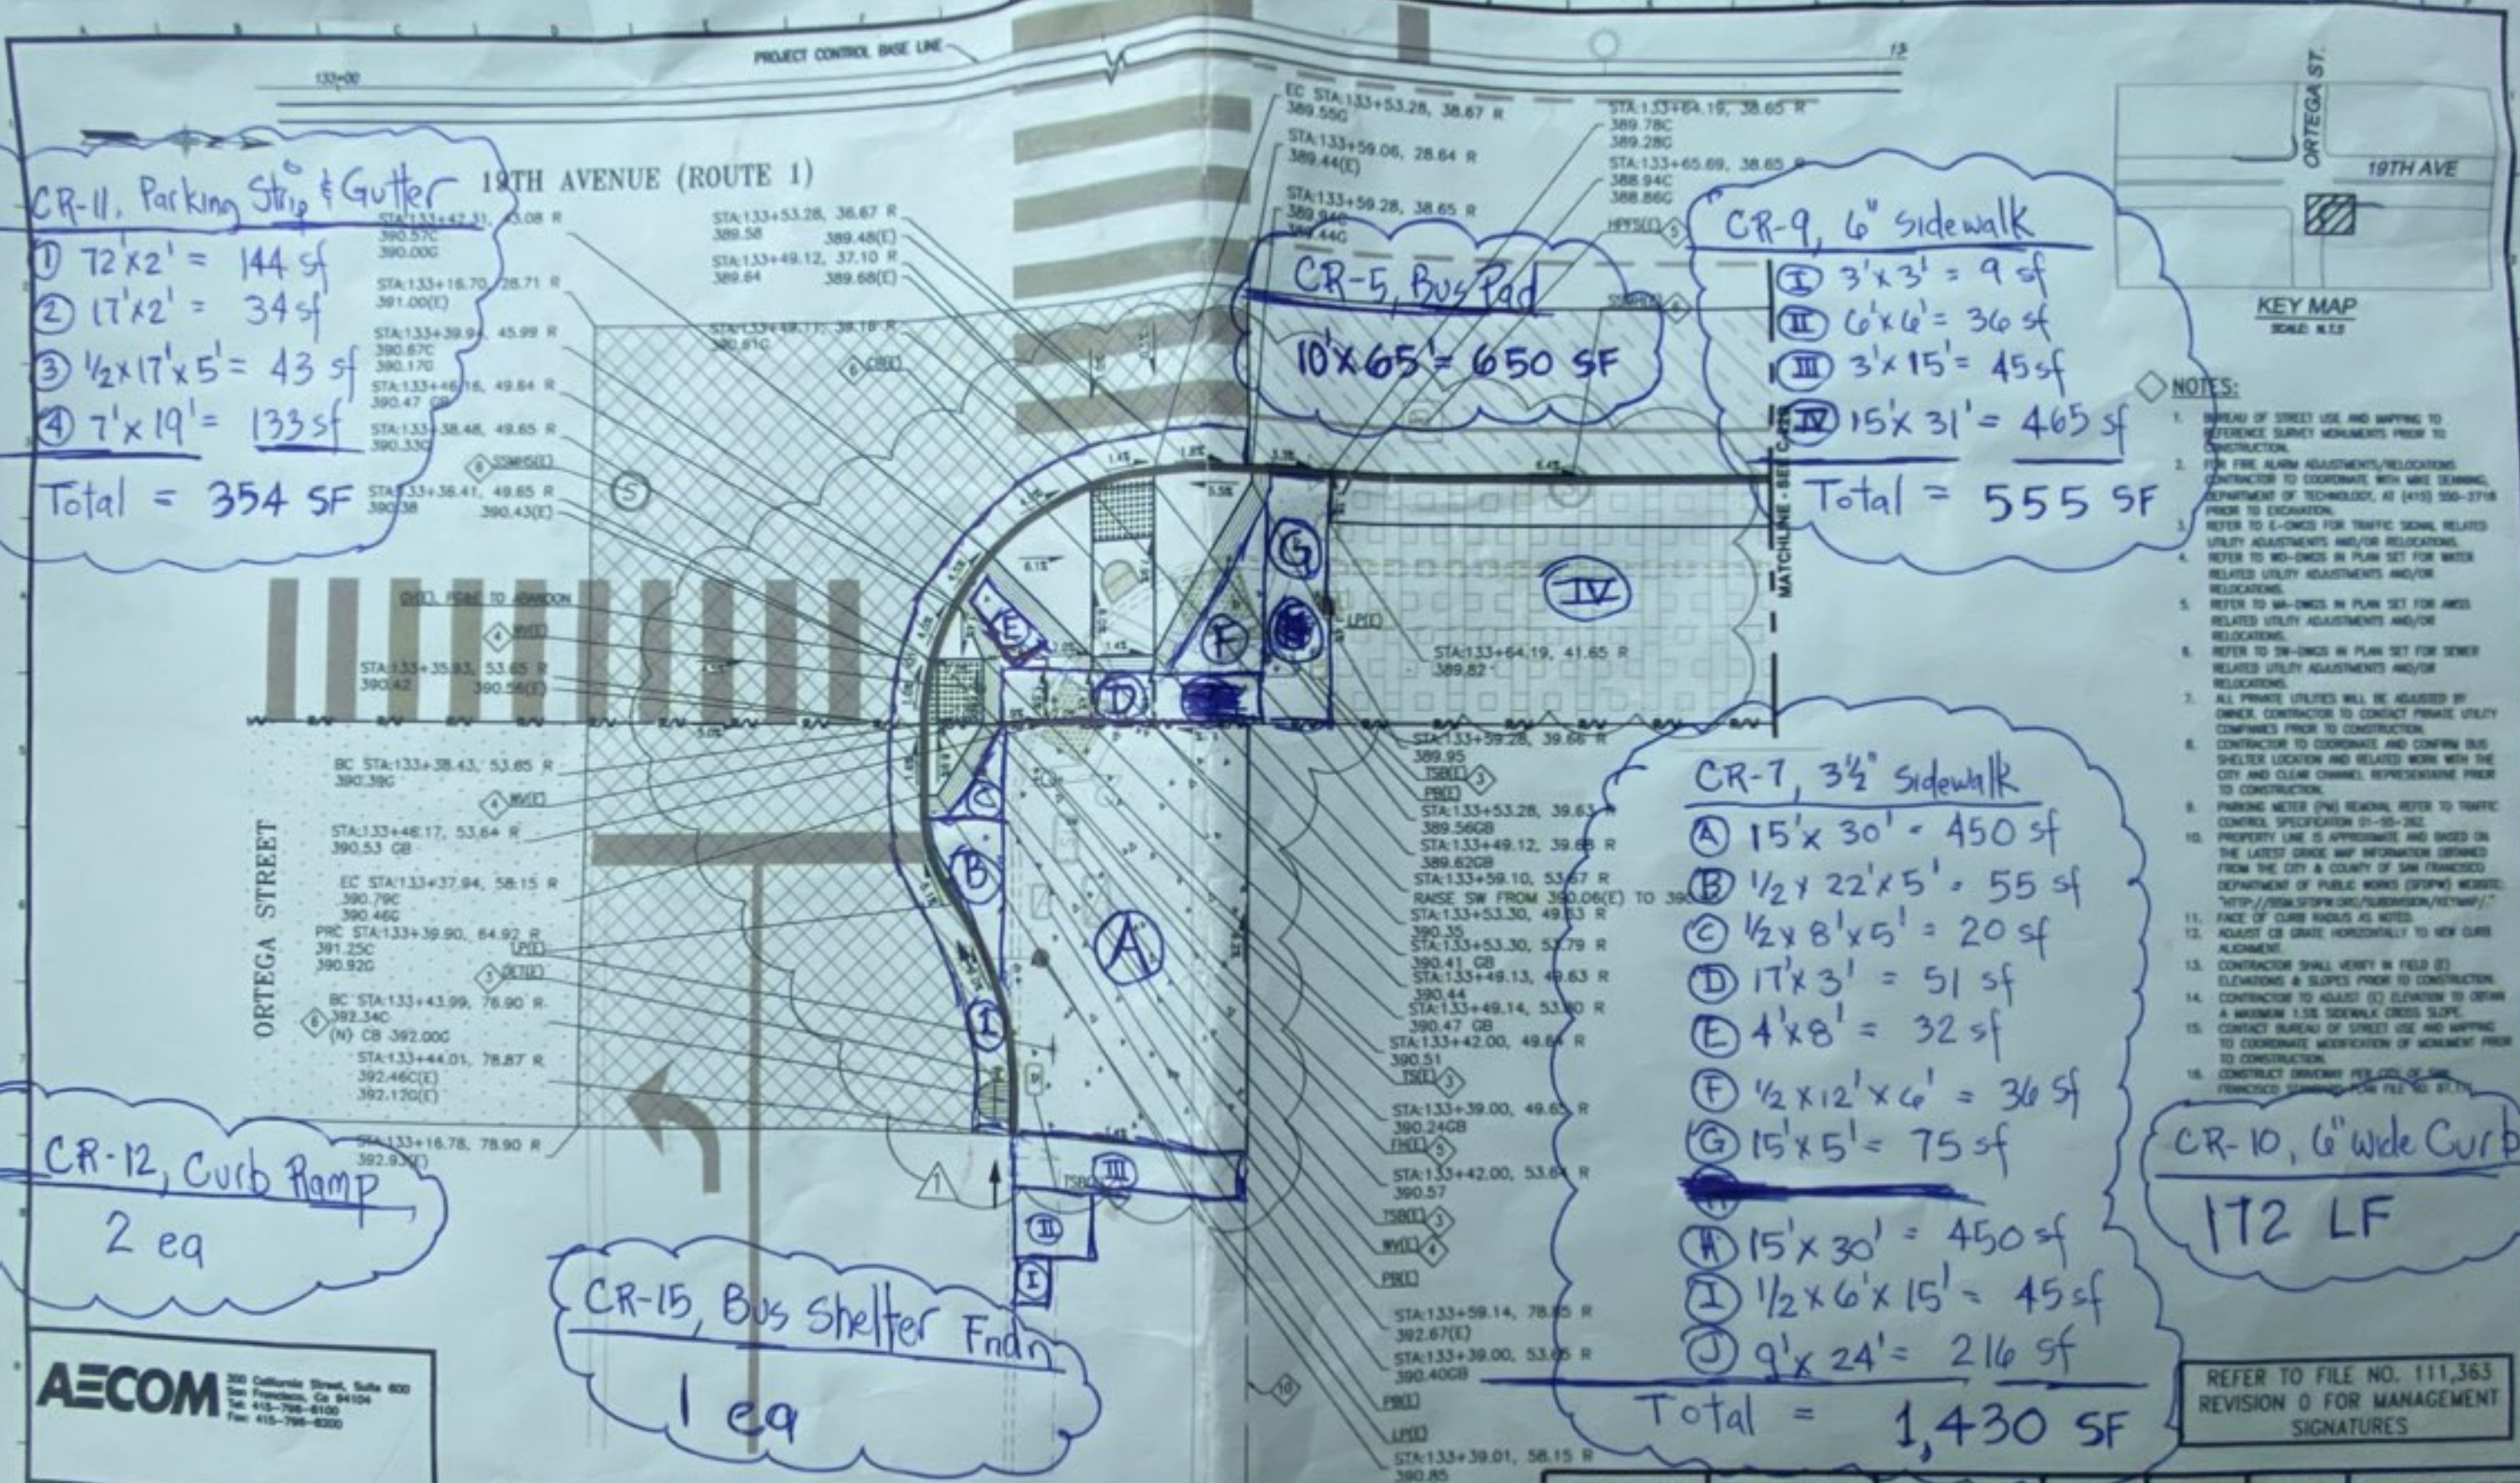

- NOTES:**
- BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS PRIOR TO CONSTRUCTION.
 - FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH FIRE DEPARTMENT OF TECHNOLOGY, AT (415) 500-2718 PRIOR TO CONSTRUCTION.
 - REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - REFER TO W-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - REFER TO W-DWGS IN PLAN SET FOR AWWA RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO CONSTRUCTION.
 - CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
 - PARKING METER (PM) READING, REFER TO TRAFFIC CONTROL SPECIFICATION 01-05-202.
 - PROPERTY LINE IS APPROXIMATE AND BASED ON THE LATEST GRADY MAP INFORMATION OBTAINED FROM THE CITY & COUNTY OF SAN FRANCISCO DEPARTMENT OF PUBLIC WORKS (DPW) WEBSITE: <http://www.sfpw.org/landmarking/property/>
 - FACE OF CURB RADIUS AS NOTED.
 - ADJUST CB GRADE HORIZONTALLY TO NEW CURB ALIGNMENT.
 - CONTRACTOR SHALL VERIFY IN FIELD (E) ELEVATIONS & SLOPES PRIOR TO CONSTRUCTION.
 - CONTRACTOR TO ADJUST (E) ELEVATION TO OBTAIN A MAXIMUM 1.5% SIDEWALK CROSS SLOPE.
 - CONTACT BUREAU OF STREET USE AND MAPPING TO COORDINATE MODIFICATION OF MONUMENT PRIOR TO CONSTRUCTION.
 - CONSTRUCT DRIVEWAY PER CITY OF SAN FRANCISCO STANDARD PLAN FILE NO. 07.171.

AECOM
 300 California Street, Suite 800
 San Francisco, CA 94104
 Tel: 415-798-8100
 Fax: 415-798-8200



BUREAU OF ENGINEERING
 CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
 20 VAN NESS AVENUE, 5TH FLOOR
 SAN FRANCISCO, CA 94102-4008

PLAN APPROVAL DATE	CONTRACT No.	PROJECT ID	DISTRICT	COUNTY	ROUTE	POST MILES TOTAL PROJECT
	04-0G3501	0400000325	04	SF	1	RD.94/4.05
19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT						
19TH AVENUE AND ORTEGA STREET CONSTRUCTION DETAILS						

NO.	DATE	ADDED SLOPE FIGURES	REVISION	BY	TS
1	1/2/20				