

SHEET NOTES

- 1 CONTRACTOR TO [AB] LOOP DETECTORS. CITY FORCES TO INSTALL WIRELESS SENSYS DETECTORS IN PLACE OF LOOP DETECTORS.
- 2 PROVIDE NEW WIRING TO MATCH EXISTING WIRING AND QUANTITY BACK TO CONTROLLER WITHOUT SPLICING. IF EXISTING WIRING HAS ENOUGH SLACK, CONTRACTOR HAS OPTION TO REUSE WITH SFMTA APPROVAL.
- 3 REUSE AND [RL] EXISTING MAS ARM POLE AS INDICATED BY POLE D ON NEW FOUNDATION. [RL] EXISTING STREET LIGHT FIXTURE. [RC] EXISTING TRAFFIC SIGNALS, MOUNTINGS, FOUNDATION, AND ASSOCIATED CONDUIT AND PULLBOX. PROVIDE NEW TRAFFIC SIGNALS AND MOUNTINGS PER POLE AND EQUIPMENT SCHEDULE. PROVIDE TEMPORARY SIGNAL/LIGHTING AS REQUIRED.
- 4 [RC] EXISTING POLE, FOUNDATION, EQUIPMENT AND ASSOCIATED CONDUIT.
- 5 CONTRACTOR TO PROVIDE APS WIRING. CITY FORCES TO PROVIDE PUSH BUTTON PER ADA REQUIREMENTS.
- 6 SPLICE INTO EXISTING STREET LIGHT FOR SERVICE
- 7 [AB] PER CALTRANS STANDARD SPECIFICATIONS.

PHASE DIAGRAM: (STEADY DEMAND)


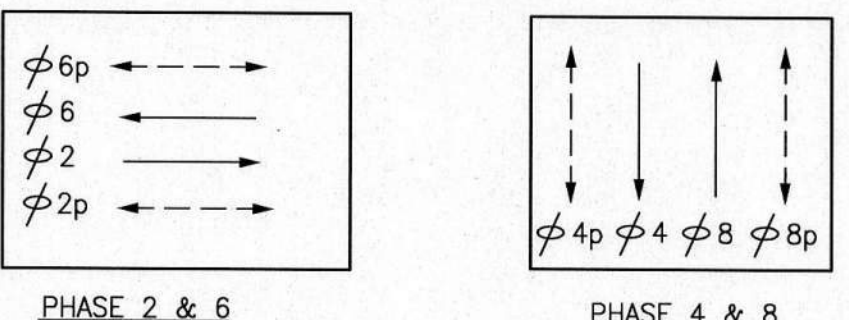


TABLE OF REVISIONS				REFERENCE INFORMATION & FILE NO. OF SURVEYS		BUREAU OF ENGINEERING CITY & COUNTY OF SAN FRANCISCO SAN FRANCISCO PUBLIC WORKS 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028		Acting Section Mgr: PHILIP THWIN Deputy Bureau Mgr: FERNANDO CISNEROS Acting Bureau Mgr: IQBAL DHAPA		Date: 12/11/19 Date: 12/16/19 Date: 12/16/19		DESIGNED: KS/DG 02/2018 DRAWN: KS/DG 02/2018 CHECKED: MW/SL 02/2018		PLAN APPROVAL DATE		CONTRACT No. 04-0G3501	PROJECT ID 0400000325	DISTRICT 04	COUNTY SF	ROUTE 1	POST MILES TOTAL PROJECT R0.94/4.05
THIS DRAWING WAS LAST MODIFIED: 12/05/19 18:02, BY: dgargaritano				SEAL OF THE CITY AND COUNTY OF SAN FRANCISCO		19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT		19TH AVENUE AND HOLLOWAY AVENUE		CONTRACT NO. 1000005832 DRAWING NO. E-1.0 FILE NO. 111,390 REV. NO.		SHEET OF SHEETS 93 OF 356		SCALE: AS SHOWN		19TH AVENUE AND HOLLOWAY AVENUE		19TH AVENUE AND HOLLOWAY AVENUE		19TH AVENUE AND HOLLOWAY AVENUE	