

2652J

July 2023

SWC 19th Ave & Vicente

Sht 1 of 2



19TH AVE


KEY MAP
SCALE: N.T.S.

CR-2, Hot Mix AC

TBD

NOTES:

1. BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS 294 AND BM10144, PRIOR TO CONSTRUCTION.
2. FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
3. REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
4. REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
5. REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
6. REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
7. ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER, CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
8. CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
9. PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-252.
10. REMOVE (E) L/S AND REPLACE WITH SIDEWALK CONFORMING TO CALTRANS STANDARDS.
11. (E) ELEVATIONS ARE BASED ON SURVEY INFORMATION RECEIVED FROM SFPD ON 10/26/2018. CONTRACTOR SHALL VERIFY CONFORM ELEVATIONS IN FIELD PRIOR TO CONSTRUCTION.
12. REFER TO PD-DWGS IN PLAN SET FOR ALL PAVEMENT MARKINGS, AND STRIPING LAYOUT.

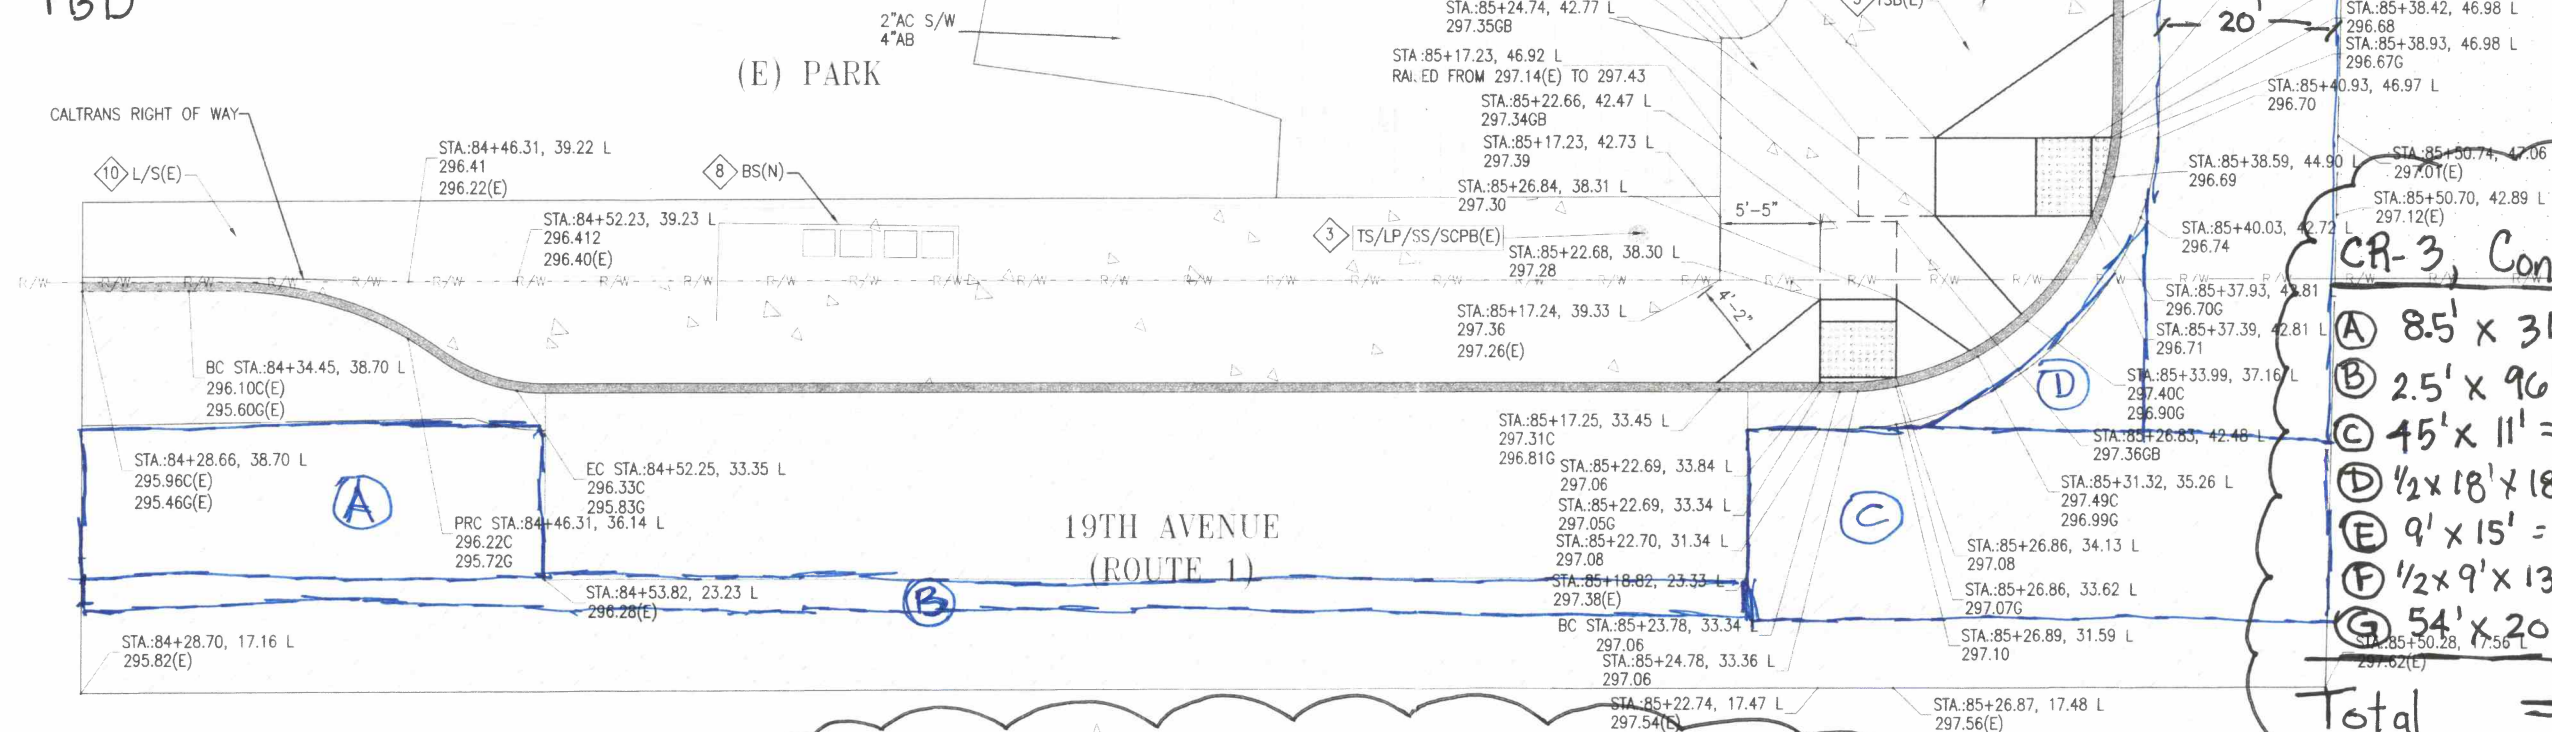

CR-3, Conc. Base

- ① 8.5' x 31' = 264 sf
② 2.5' x 96' = 240 sf
③ 45' x 11' = 495 sf
④ 1/2 x 18' x 18' = 162 sf
⑤ 9' x 15' = 135 sf
⑥ 1/2 x 9' x 13' = 59 sf
⑦ 54' x 20' = 1,080 sf

Total = 2,435 SF

CR 4, 12" Thick Class II, Aggregate Base

$$(2,435 \text{ sf} \times 1') \div 27 = 90.2 \text{ CY}$$


TELAMON
ENGINEERING CONSULTANTS, INC.
855 FOLSOM STREET, SUITE 142
SAN FRANCISCO, CA 94107
TEL: 415-837-1336 FAX: 415-837-1354

REFERENCE INFORMATION
& FILE NO. OF SURVEYS

BUREAU OF ENGINEERING
CITY & COUNTY OF SAN FRANCISCO
SAN FRANCISCO PUBLIC WORKS
30 VAN NESS AVENUE, 5TH FLOOR
SAN FRANCISCO, CA 94102-6028

Asst. Section Mgr. *Eric Kjelberg* Date: 12/13/19
Deputy Bureau Mgr. *FRANCISCO CISNEROS* Date: 12/16/19
Asst. Bureau Mgr. *GRAL THAPA* Date: 12/16/19

DESIGNED: DATE: 12/19
DZ
DRAWN: DATE: 12/19
KN
CHECKED: DATE: 12/19
MC



SCALE:
1" = 5'
SHEET OF SHEETS
48 OF 356

19TH AVENUE (STATE ROUTE 1)
COMBINED CITY PROJECT
19TH AVENUE AND VICENTE STREET
CONSTRUCTION DETAILS

CONTRACT ID:
1000005832
DRAWING NO:
C-13B
FILE NO:
111,345
REV. NO:

NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
THIS DRAWING WAS LAST MODIFIED: 12/11/19 23:32, BY: Doug				

Drawing Path: P:\15045_19th Avenue Curb Ramps\3.Dwg\CR-13B.dwg, Logon: Doug
Plot Time: Wed, 11 Dec 2019 - 11:32am
Measurement Units are English
Drawing Scale: 10
Model Units: Undefined