


Oct. 2021

Page 1 of 2
D. Barajas

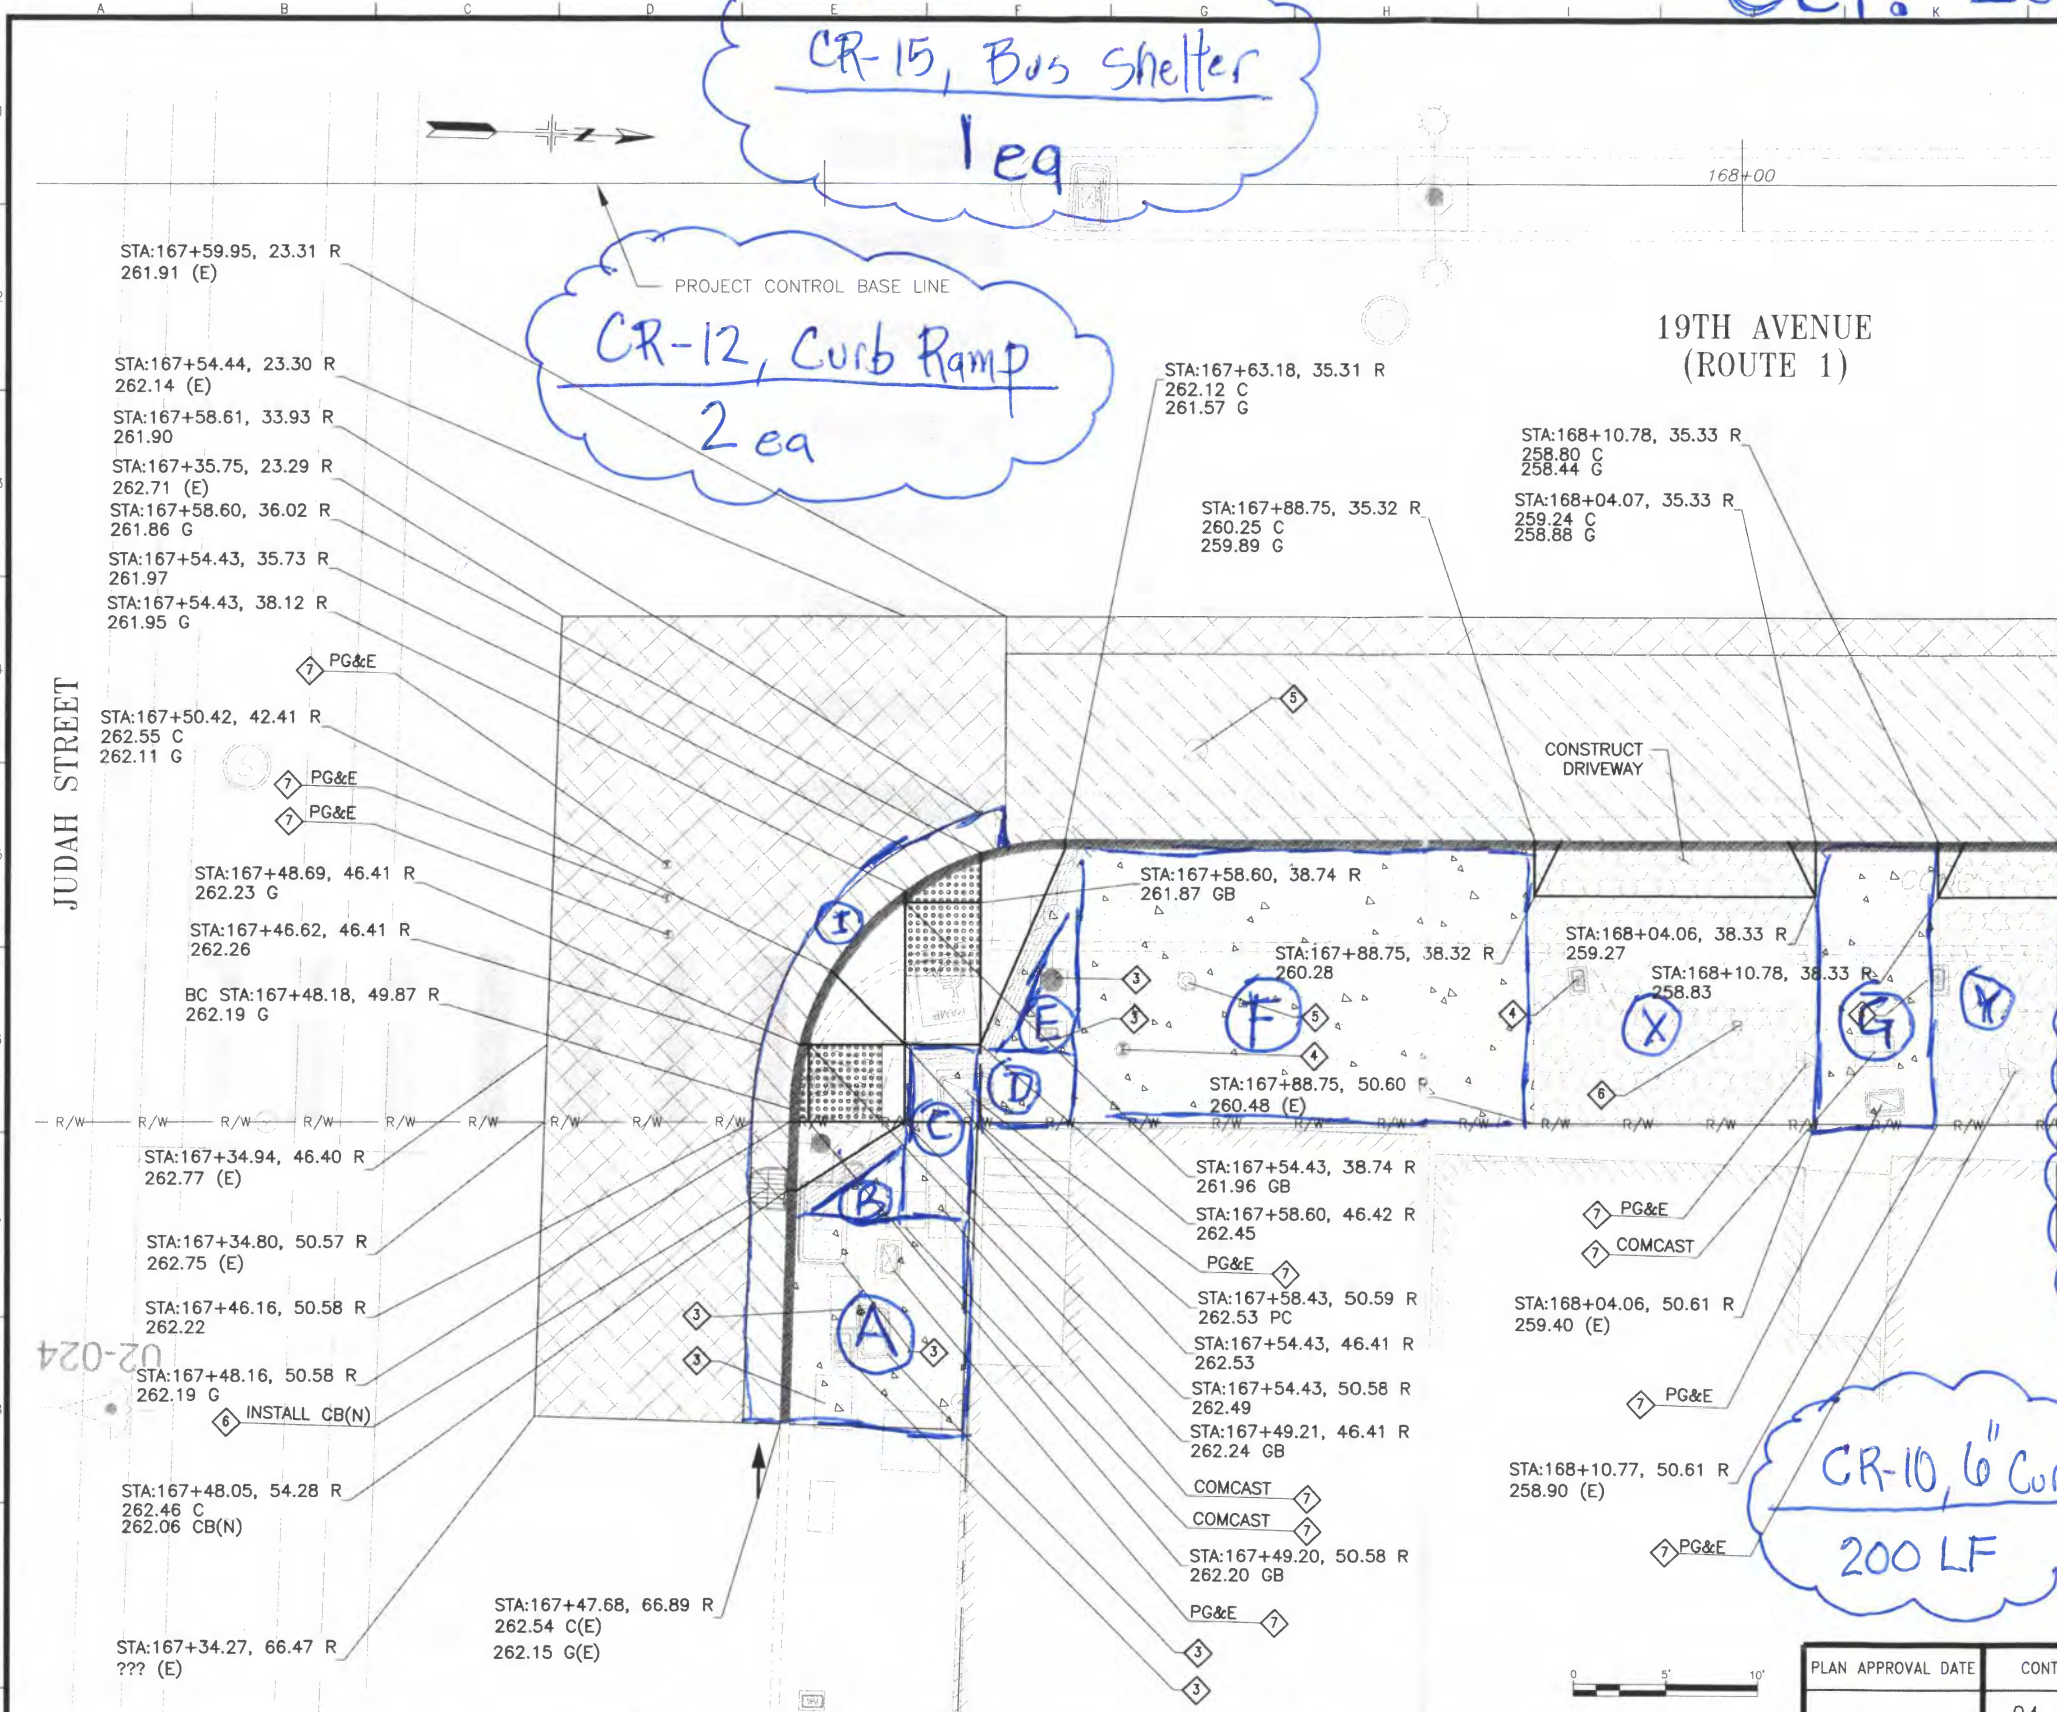

- NOTES
- BUREAU OF STREET USE AND MAPPING TO REFERENCE SURVEY MONUMENTS BM10145, PRIOR TO CONSTRUCTION.
 - FOR FIRE ALARM ADJUSTMENTS/RELOCATIONS CONTRACTOR TO COORDINATE WITH MIKE DENNING, DEPARTMENT OF TECHNOLOGY, AT (415) 550-2718 PRIOR TO EXCAVATION.
 - REFER TO E-DWGS FOR TRAFFIC SIGNAL RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - REFER TO WD-DWGS IN PLAN SET FOR WATER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - REFER TO MA-DWGS IN PLAN SET FOR AWSS RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - REFER TO SW-DWGS IN PLAN SET FOR SEWER RELATED UTILITY ADJUSTMENTS AND/OR RELOCATIONS.
 - ALL PRIVATE UTILITIES WILL BE ADJUSTED BY OWNER. CONTRACTOR TO CONTACT PRIVATE UTILITY COMPANIES PRIOR TO DEMOLITION.
 - CONTRACTOR TO COORDINATE AND CONFIRM BUS SHELTER LOCATION AND RELATED WORK WITH THE CITY AND CLEAR CHANNEL REPRESENTATIVE PRIOR TO CONSTRUCTION.
 - FOR PARKING METER (PM) REMOVAL REFER TO TRAFFIC CONTROL SPECIFICATION 01-55-262

CR-7, 3 1/2" Thick Concrete Sidewalk

A 10' x 10' = 100 sf
B 1/2 x 4' x 6' = 12 sf
C 9' x 4' = 36 sf
D 5' x 7' = 35 sf
E 1/2 x 5' x 11' = 28 sf
F 14.5' x 29' = 421 sf
G 14.5' x 9' = 131 sf
H 14.5' x 21' = 305 sf
I 14.5' x 21' = 305 sf
J 1/2 x 4.5' x 19' = 43 sf
K 10' x 19' = 190 sf

Sub Total = 1,606 sf
- Bus Shelter Area = 13' x 6' = 78 sf
TOTAL = 1,528 sf

REFERENCE INFORMATION & FILE NO. OF SURVEYS				BUREAU OF ENGINEERING CITY & COUNTY OF SAN FRANCISCO SAN FRANCISCO PUBLIC WORKS 30 VAN NESS AVENUE, 5TH FLOOR SAN FRANCISCO, CA 94102 - 6028		Date: 12/13/19 DESIGNED: J. MUNOZ DRAWN: J. MUNOZ CHECKED: C. YU			19TH AVENUE (STATE ROUTE 1) COMBINED CITY PROJECT		CONTRACT ID: 1000005832
TABLE OF REVISIONS				Acting Section Mgr: ERIC KJELSBERG Deputy Bureau Mgr: FERNANDO CISNEROS Acting Bureau Mgr: IQBAL DHAPA		12/16/19			19TH AVENUE AND JUDAH STREET CONSTRUCTION DETAIL		FILE NO. 111,377
NO.	DATE	DESCRIPTION	BY	APP.							

THIS DRAWING WAS LAST MODIFIED: 12/12/19 15:25, BY: jmunoz

Drawn By: V:\26521_19th Avenue Combined City Project\2 Design Working Drawings\ESH\Current\UM\C-27\Kin\Dimas\G.Dwg, Login: jmunoz
Plot time: Thu, 12 Dec 2019 - 3:56pm
Model Units: Feet